

Programming Principles in Python (CSCI 503/490)

OS Integration

Dr. David Koop

Debugging

Print Statements

- Just print the values or other information about identifiers:
- ```
def my_function(a, b):
 print(a, b)
 print(b - a == 0)
 return a + b
```
- Note that we need to remember what is being printed
- Can add this to print call, or use f-strings with trailing = which causes the name and value of the variable to be printed
- ```
def my_function(a, b):  
    print(f"{a=} {b=} {b - a == 0}")  
    return a + b
```


Logging Library


- Allows different levels of output (e.g. DEBUG, INFO, WARNING, ERROR, CRITICAL)
- Can output to a file as well as stdout/stderr
- Can configure to suppress certain levels or filter messages
- ```
import logging
logger = logging.Logger('my-logger')
logger.setLevel(logging.DEBUG)
def my_function(a,b):
 logger.debug(f"{a=} {b=} {b-a == 0}")
 return a + b
my_function(3, 5)
```

# Python Debugger (pdb)

---

- Debuggers offer the ability to inspect and interact with code as it is running
  - Post-mortem inspection (`%debug`, `python -m pdb`)
  - Breakpoints (just call `breakpoint()`)
- pdb is standard Python, also an `ipdb` variant for IPython/notebooks
  - `p` [print expressions]: Print expressions, comma separated
  - `n` [step over]: continue until next line in **current function**
  - `s` [step into]: stop at next line of code (same function or one being called)
  - `c` [continue]: continue execution until next breakpoint


# JupyterLab Debugger

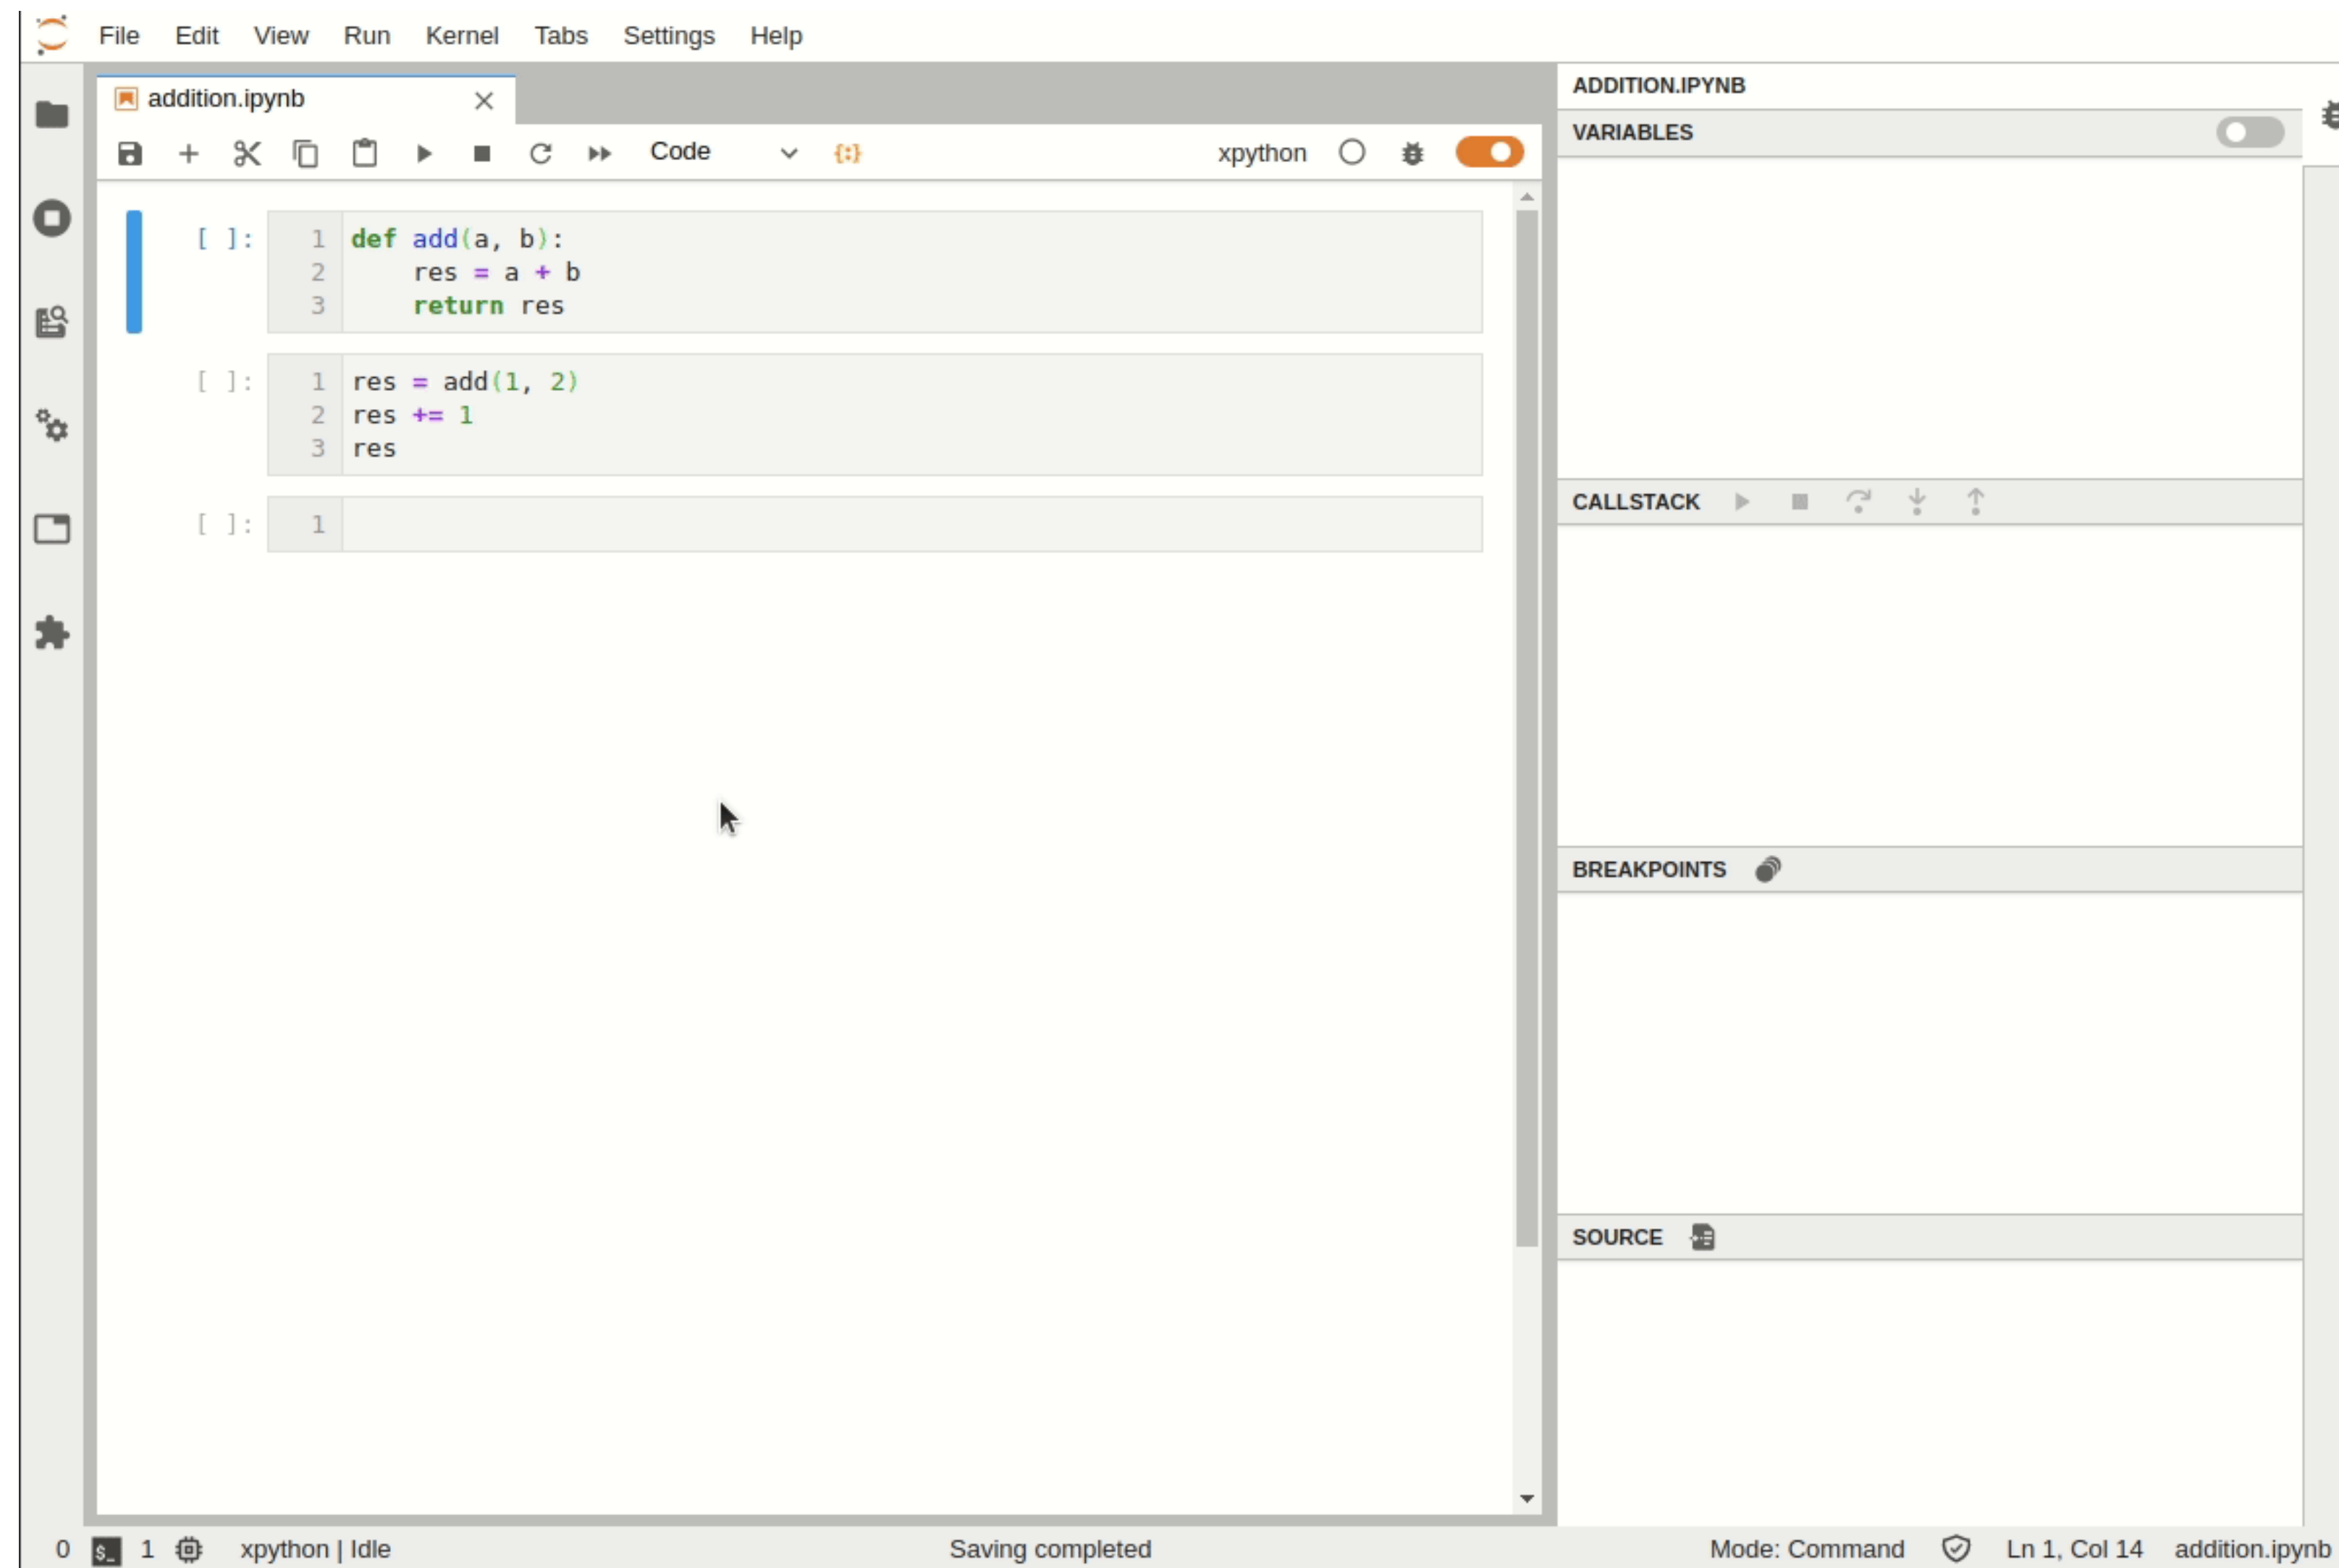

[[JupyterLab Docs](#)]



# JupyterLab Debugger

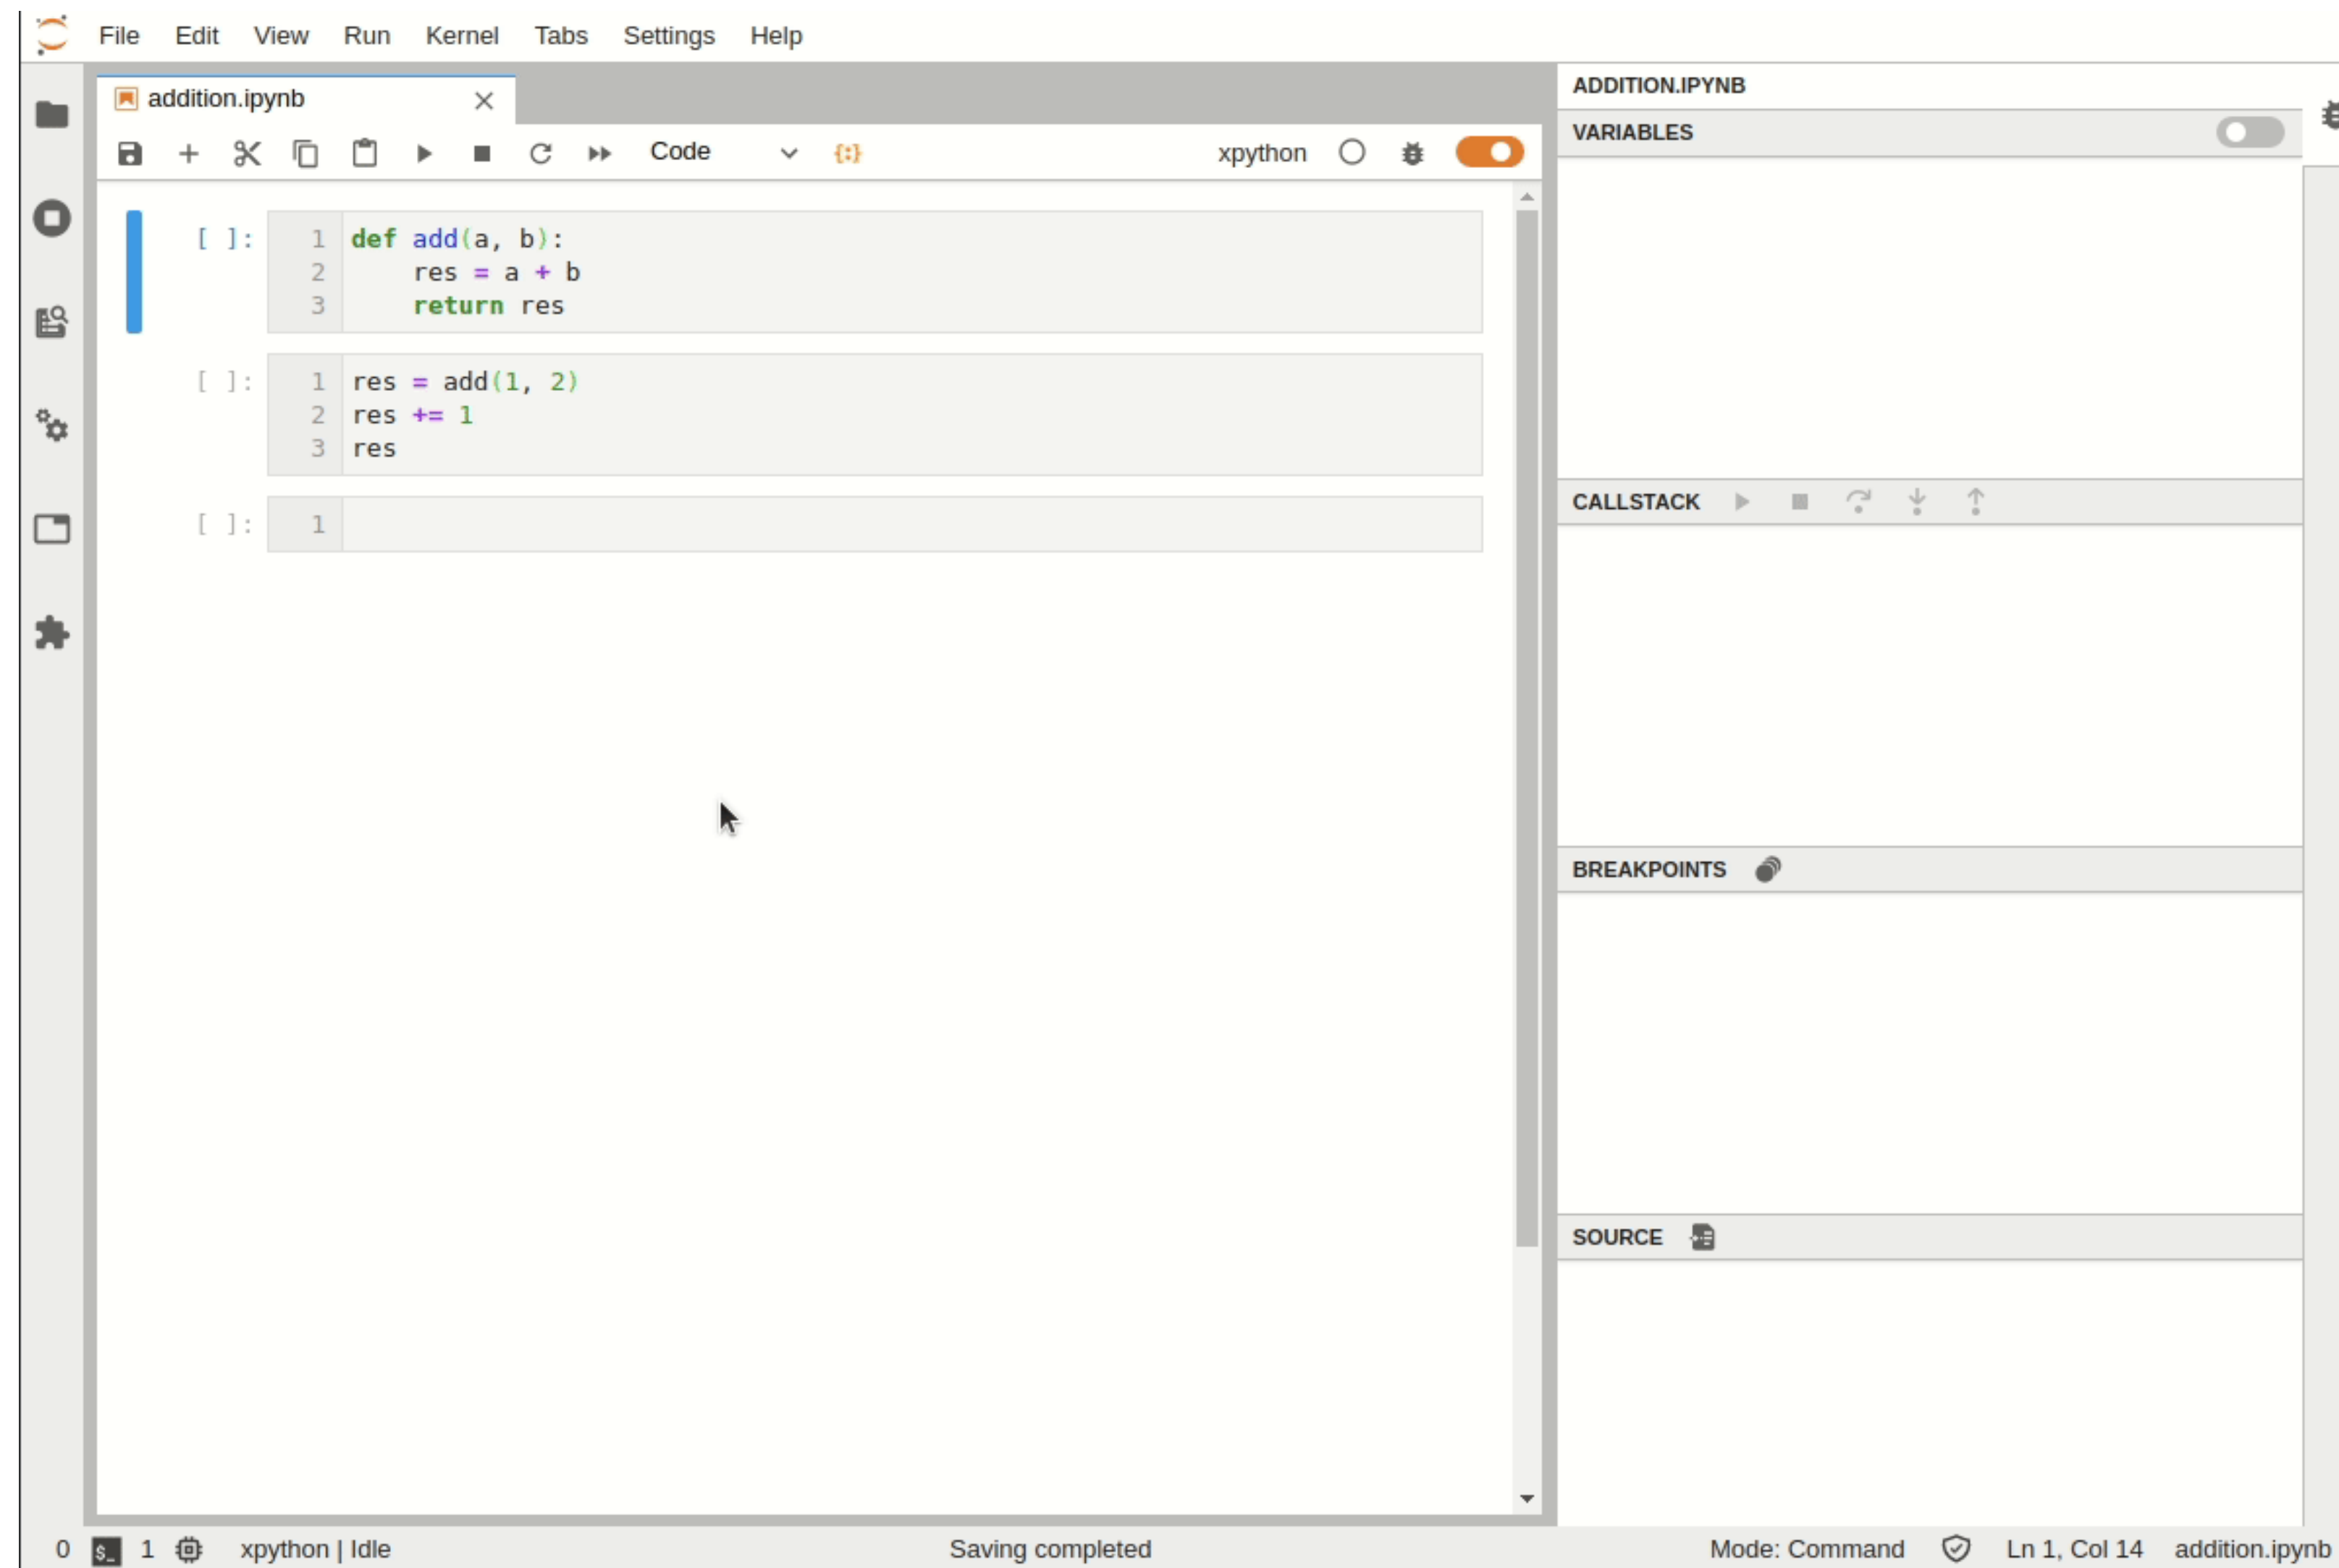

[[JupyterLab Docs](#)]

# Python 3.11: Fine-Grained Error Locations

---

- Python 3.11 was released yesterday
- Code is faster (10-60% faster than 3.10, 25% average on benchmark)
- Debugging: Errors can show more specific locations
- Old Error:
  - Traceback (most recent call last):  
File "distance.py", line 11, in <module>  
print(manhattan\_distance(p1, p2))  
File "distance.py", line 6, in manhattan\_distance  
return abs(pt\_1.x - pt\_2.x) + abs(pt\_1.y - pt\_2.y)  
AttributeError: 'NoneType' object has no attribute 'x'



# Python 3.11: Fine-Grained Error Locations

---

- New Error:

- Traceback (most recent call last):

- File "distance.py", line 11, in <module>

- print(manhattan\_distance(p1, p2))

- ^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^

- File "distance.py", line 6, in manhattan\_distance

- return abs(pt\_1.x - pt\_2.x) + abs(pt\_1.y - pt\_2.y)

- ^^^^^^

- AttributeError: 'NoneType' object has no attribute 'x'

# Python 3.11: Fine-Grained Error Locations

---

- Traceback (most recent call last):  
File "query.py", line 37, in <module>  
    magic\_arithmetic('foo')  
File "query.py", line 18, in magic\_arithmetic  
    return add\_counts(x) / 25  
            ^^^^^^^^^^^^  
  
File "query.py", line 24, in add\_counts  
    return 25 + query\_user(user1) + query\_user(user2)  
                    ^^^^^^^^^^^^^^^^^^^^  
  
File "query.py", line 32, in query\_user  
    return count(db, response['a']['b']['c']['user'])  
                                                            ^^^^^^  
  
TypeError: 'NoneType' object is not subscriptable

# Testing



# Testing via Print/If Statements

---

- Can make sure that types or values satisfy expectations
- `if not isinstance(a, str):`  
    `raise Exception("a is not a string")`
- `if 3 < a <= 7:`  
    `raise Exception("a should not be in (3,7]")`
- These may not be something we need to always check during runtime

# Assertions

---

- Shortcut for the manual if statements
- Have python throw an exception if a particular condition is not met
- `assert` is a keyword, part of a statement, not a function
- `assert a == 1, "a is not 1"`
- Raises `AssertionError` if the condition is not met, otherwise continues
- Can be caught in an except clause or made to crash the code
- Problem: first failure ends error checks

# Unit Tests

---

- "Testing shows the presence, not the absence of bugs", E. Dijkstra
- Want to test many parts of the code
- Try to cover different functions that may or may not be called
- Write functions that test code
- ```
def add(a, b):  
    return a + b + 1  
def test_add():  
    assert add(3, 4) == 7, "add not working"  
def test_operator():  
    assert operator.add(3, 4) == 7, "__add__ not working"
```
- If we just call these in a program, first error stops all testing

Unit Testing Framework

- unittest: built in to Python Standard Library
 - nose2: nose tests, was nose, now nose2 (some nicer filtering options)
 - pytest: extra features like restarting tests from last failed test
 - doctest: built-in, allows test specification in docstrings
-
- With the exception of doctest, the frameworks allow the same specification of tests

unittest

- Subclass from `unittest.TestCase`, write `test_*` functions
- Use `assert*` instance functions
- `import unittest`

```
class TestOperators(unittest.TestCase):  
    def test_add(self):  
        self.assertEqual(add(3, 4), 7)  
  
    def test_add_op(self):  
        self.assertEqual(operator.add(3, 4), 7)  
unittest.main(argv=[''], exit=False)
```


Lots of Assertions

- `assertEqual/assertNotEqual`: smart about lists/tuples/etc.
- `assertLess/assertGreater/assertLessEqual/assertGreaterEqual`
- `assertAlmostEqual`: allows for floating-point arithmetic errors
- `assertTrue/assertFalse`: check boolean assertions
- `assertIsNone`: check for `None` values
- `assertIn`: check containment
- `assertIsInstance`
- `assertRegex`: check that a regex matches
- `assertRaises`: check that a particular exception is raised

Test Options

- Run only certain tests
 - `argv=['']` # run default set of tests
 - `argv=['', 'TestLists']` # run all `test*` methods in `TestLists`
 - `argv=['', 'TestAdd.test_add']` # run `test_add` in `TestAdd`
- Show more detailed output
 - By default, one character per test plus listing at end
 - `F.`
 - `.` indicates success, `F` indicates failed, `E` indicates error
 - `verbosity=2`
 - `test_add (__main__.TestAdd) ... FAIL`
`test_add_op (__main__.TestAdd) ... ok`

Startup and Cleanup for Tests

- `setUp`: instantiate particular objects, read data, etc.
- `tearDown`: get rid of unnecessary objects
- Example: set up a GUI widget that will be tested
 - ```
def setUp(self):
 self.widget = Widget(some_params)
def tearDown(self):
 self.widget.dispose()
```
- Also functions for setting up classes and modules



# Mock Testing

---

- Sometimes we don't want to actually execute all of the code that may be triggered by a particular test
- Examples: code that posts to Twitter, code that deletes files
- We can mock this behavior by substituting the actual methods with mockers
- Can even simulate side effects like having the function being mocked raise an exception signifying the network is done

# Mock Examples

---

- Can check whether/how many times the mocked function was called
- ```
from unittest.mock import MagicMock
thing = ProductionClass()
thing.method = MagicMock(return_value=3)
thing.method(3, 4, 5, key='value')
thing.method.assert_called_with(3, 4, 5, key='value')
```
- ```
from unittest.mock import patch
with patch.object(ProductionClass, 'method',
 return_value=None) as mock_method:
 thing = ProductionClass()
 thing.method(1, 2, 3)
mock_method.assert_called_once_with(1, 2, 3)
```

[[Python Documentation](#)]

# Assignment 6

---

- Object-Oriented Programming & Exceptions
- Classes for an online market
- Use Inheritance
- Due Nov. 1 (before the exam)



# Test 2

---

- Thursday, November 3, 12:30-1:45pm in PM 253
- Covers material from the beginning of course, emphasizing material since Test 1
- Similar Format to Test 1



# Integration with the Operating System

---

- For now, focus on the filesystem
  - Listing & Traversing Directories
  - Creating Directories
  - Matching Files
  - Copying, Moving, Removing Files/Directories
- Using Material by Vuyisile Ndlovu:
  - <https://realpython.com/working-with-files-in-python/>





# Modules

---

- In general, cross-platform! (Linux, Mac, Windows)
- `os`: translations of operating system commands
- `shutil`: better support for file and directory management
- `fnmatch`, `glob`: match filenames, paths
- `os.path`: path manipulations
- `pathlib`: object-oriented approach to path manipulations, also includes some support for matching paths

# Directory Listing

---

- Old approach: `os.listdir`
- New approach: `os.scandir`
  - Uses iterators, object-based, faster (fewer stat calls), returns `DirEntry`
  - `with os.scandir('my_directory/') as entries:`  
    `for entry in entries:`  
        `print(entry.name)`
- Pathlib approach:
  - `from pathlib import Path`  
    `path = Path('my_directory/')`  
    `for entry in path.iterdir():`  
        `print(entry.name)`

# Listing Files in a Directory

---

- Difference between file and directory
- `isfile/is_file` methods:
  - `os.path.isfile`
  - `DirEntry.is_file`
  - `Path.is_file`
- Test while iterating through
  - ```
from pathlib import Path
basepath = Path('my_directory/')
files_in_basepath = basepath.iterdir()
for item in files_in_basepath:
    if item.is_file():
        print(item.name)
```


Listing Subdirectories

- Use `isdir/is_dir` instead
 - ```
from pathlib import Path
basepath = Path('my_directory/')
files_in_basepath = basepath.iterdir()
for item in files_in_basepath:
 if item.is_dir():
 print(item.name)
```

# File Attributes

---

- Getting information about a file is "stat"-ing it (from the system call name)
- Names are similarly a bit esoteric, use documentation
- `os.stat` or use `.stat` methods on `DirEntry/Path`
- Modification time:
  - ```
from pathlib import Path
current_dir = Path('my_directory')
for path in current_dir.iterdir():
    info = path.stat()
    print(info.st_mtime)
```
- Also can check existence: `path.exists()`

Making Directories

- Modify the filesystem
- Know where you **currently are** first
 - `os.getcwd()` Or `Path.cwd()`: current working directory
- `os.mkdir`: single subdirectory
- `os.makedirs`: multiple subdirs
- `pathlib.Path.mkdir`: single or multiple directories (with `parents=True`)
- Can raise exceptions (e.g. file already exists)
- ```
from pathlib import Path
p = Path('example_directory/')
p.mkdir()
```



# Filename Pattern Matching

---

- `string.endswith/startswith`: no wildcards
- `fnmatch`: adds `*` and `?` wildcards to use when matching (**not** just like regex!)
- `glob.glob`: treats filenames starting with `.` as special
  - can do recursive matchings (e.g. in subdirectories) using `**`
- `pathlib.Path.glob`: object-oriented version of `glob`
- ```
from pathlib import Path
p = Path('.')
for name in p.glob('*.*'):
    print(name)
```


Pathname Manipulation

- `os.path.split` returns tuple (dirname, basename)
 - can use `os.path.dirname/basename` to get these only
 - `os.path.split('/path/to/file.txt')` # `('/path/to', 'file.txt')`
- `os.path.join`: inverse of split
- `os.path.splitext`: split filename and extension
- `pathlib.Path` has OOP versions:
 - `.parent/.name == dirname/basename`
 - `.stem/.suffix ~ splitext`, also suffixes
 - `/` operator (also `joinpath ~ join`)

Traversing Directories and Processing Files

- `os.walk`
- ```
for dirpath, dirnames, files in os.walk('.'):
 print(f'Found directory: {dirpath} ')
 for file_name in files:
 print(file_name)
```
- Returns three values on loop iteration:
  1. The name of the current directory
  2. A list of subdirectories in the current directory
  3. A list of files in the current directory
- `topdown` and `followlinks` arguments
- `pathlib` algorithms exist but DIY

# Temporary Files and Directories

---

- tempfile knows system directories for storing temporary files
- deletes the file when it is closed
- ```
from tempfile import TemporaryFile  
with TemporaryFile('w+t') as fp:  
    fp.write('Hello universe!')  
    fp.seek(0)  
    fp.read()  
# File is now closed and removed
```
- Can also use in with statement (context manager)
- Can also create temporary directories

Deleting Files and Directories

- Files: `os.remove` or `os.unlink`, or `pathlib.Path.unlink`
- `from pathlib import Path`
`Path('home/data.txt').unlink()`
- Directories: `rmdir` or `shutil.rmtree`
 - `rmdir` only works if the directory is **empty**
 - **Careful:** this deletes the entire directory (and everything inside it)
 - `shutil.rmtree('my_documents/bad_dir')`

Copying Files & Directories

- `shutil.copy`: copy file to specified directory
 - `shutil.copy('path/to/file.txt', 'path/to/dest_dir')`
- `shutil.copy2` preserves metadata, same syntax
- Copy entire tree: `shutil.copytree('data_1', 'data1_backup')`

Moving and Renaming Files/Directories

- Moving files or directories:
 - `shutil.move('dir_1/', 'backup/')`
- Renaming files or directories:
 - `os.rename`
 - `pathlib.Path.rename`
 - `data_file = Path('data_01.txt')`
`data_file.rename('data.txt')`

Archives

- `zipfile`: module to deal with zip files
- `tarfile`: module to deal with tar files, can compress (`tar.gz`)
- Easier: `shutil.make_archive`
 - Specify base name, format, and root directory to archive
 - `shutil.make_archive('data/backup', 'tar', 'data/')`
- To extract, use `shutil.unpack_archive`