

Data Visualization (CSCI 627/490)

Web Programming


Dr. David Koop

Definition of Visualization

“Computer-based visualization systems provide visual representations of datasets designed to help people carry out tasks more effectively.”



— T. Munzner

Why Computers?

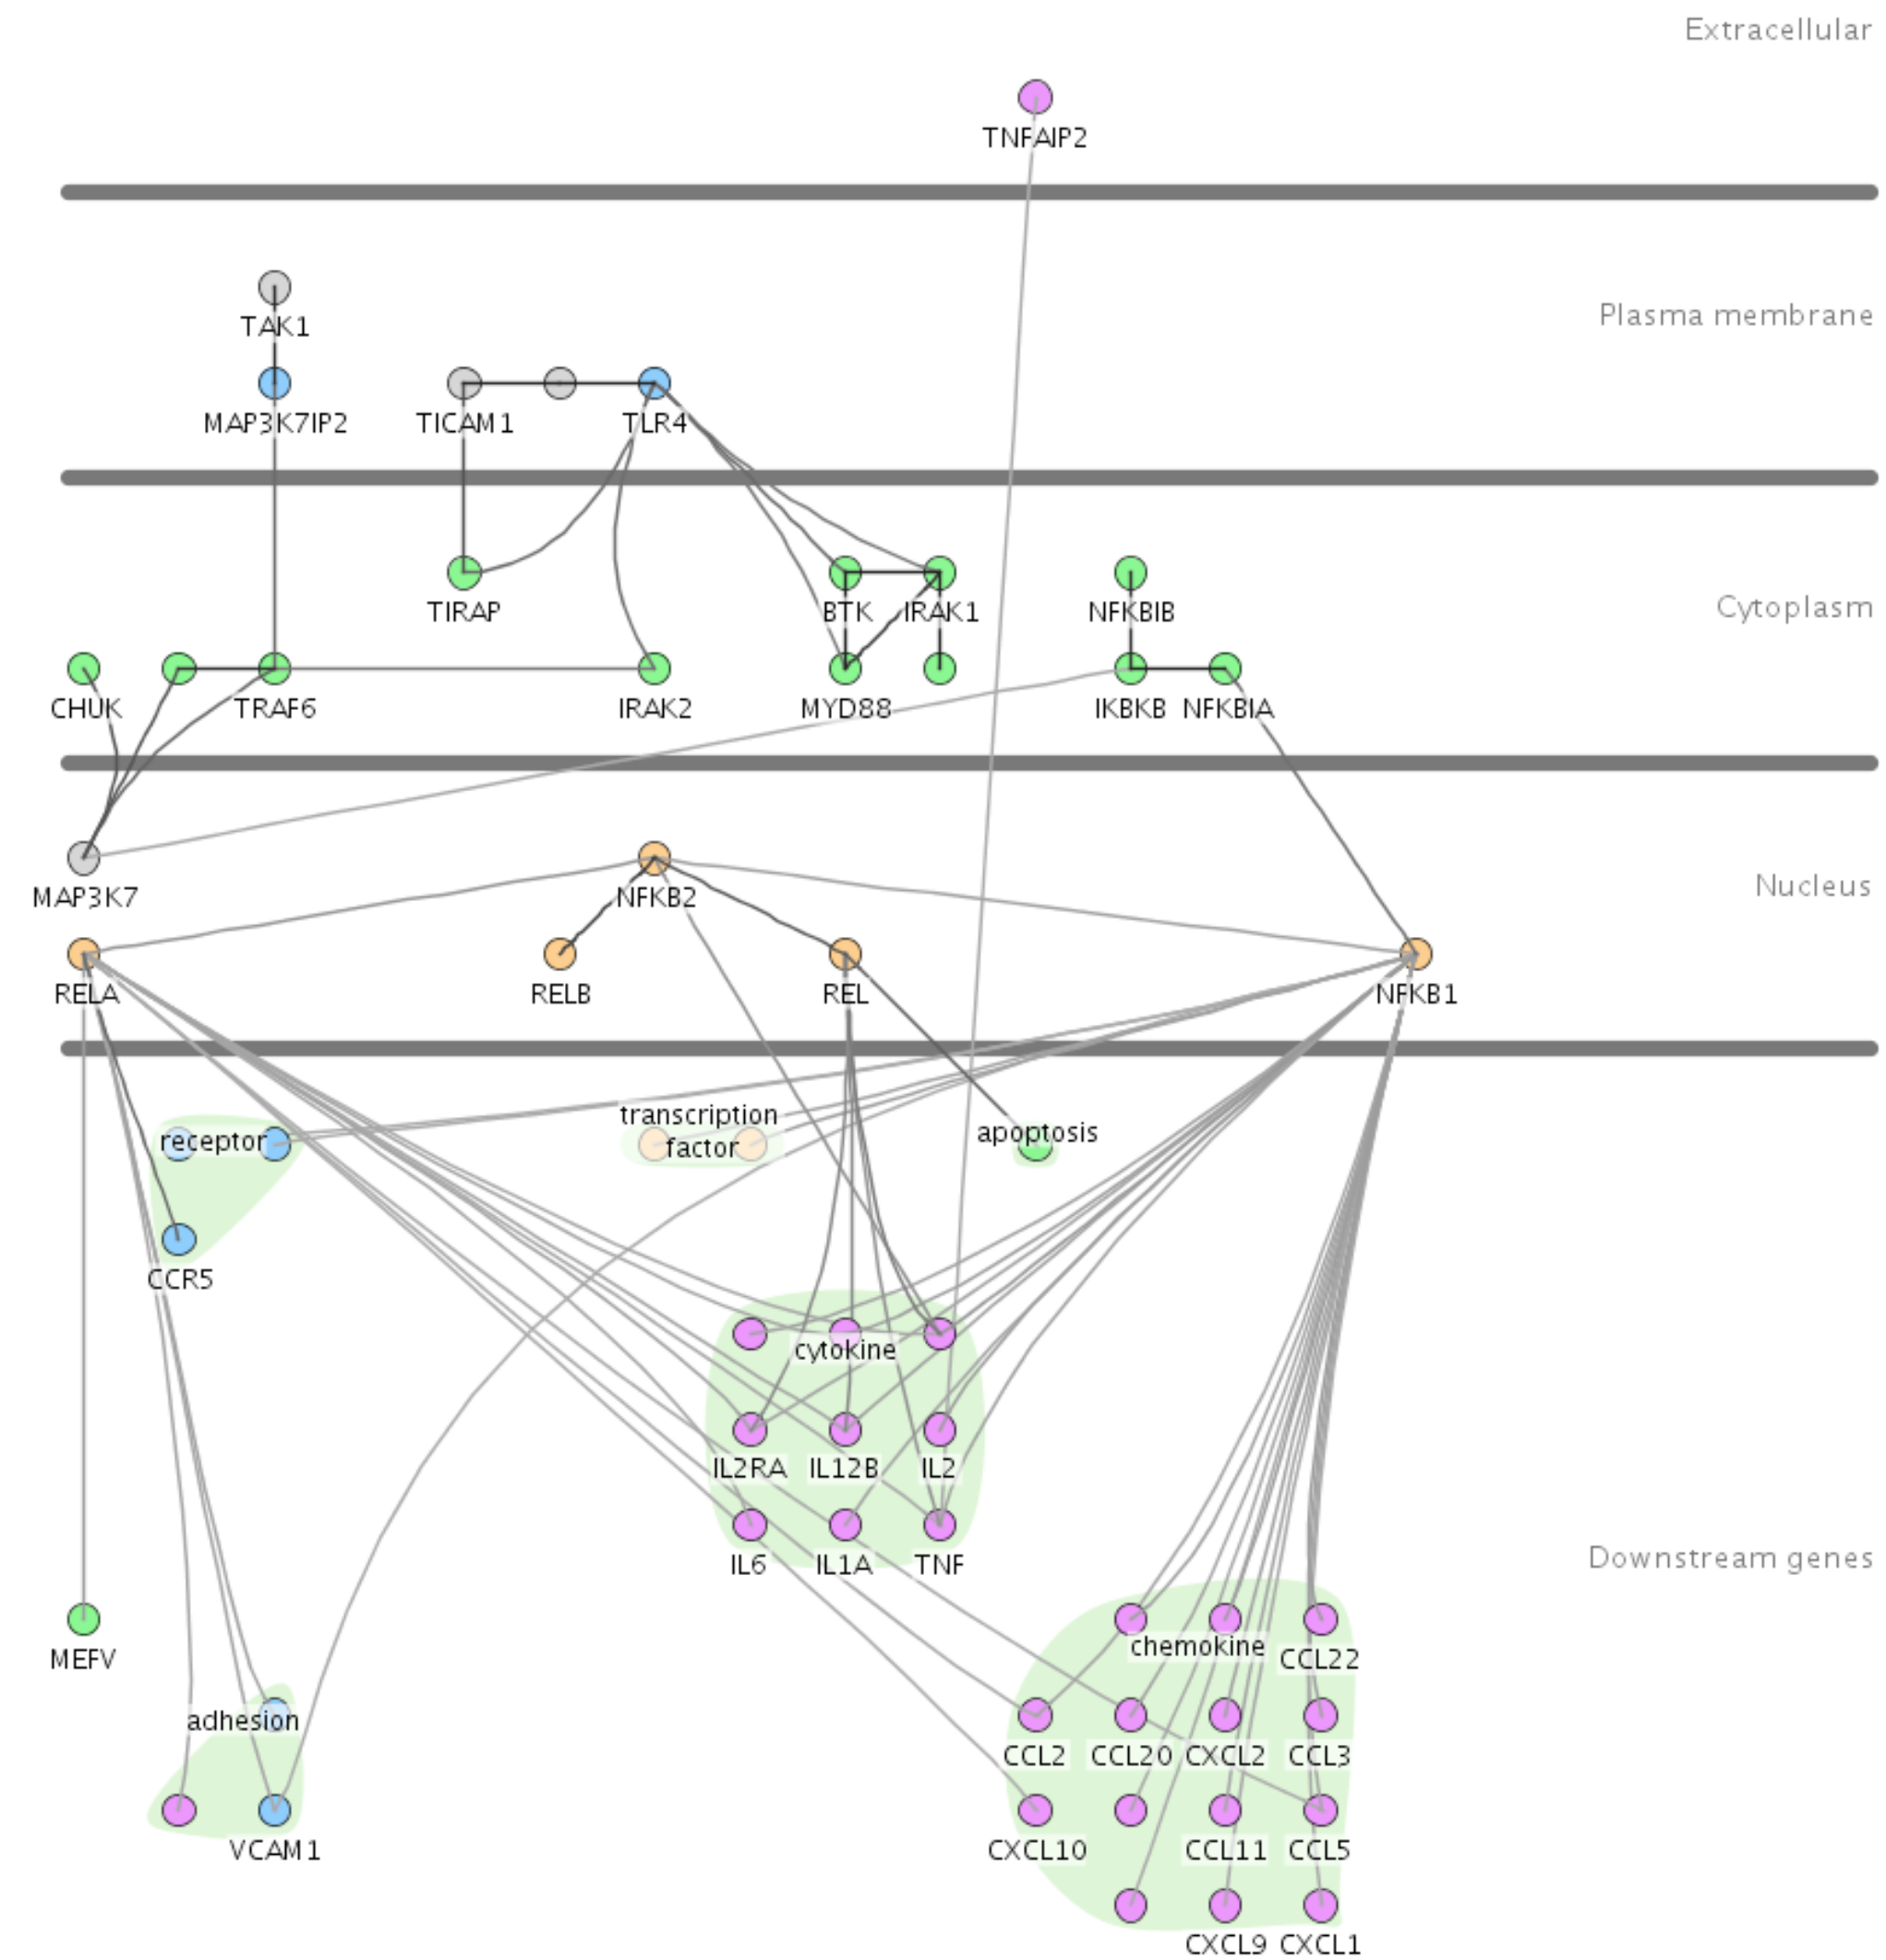





[Cerebral, Barsky et al., 2007]

Why Computers?

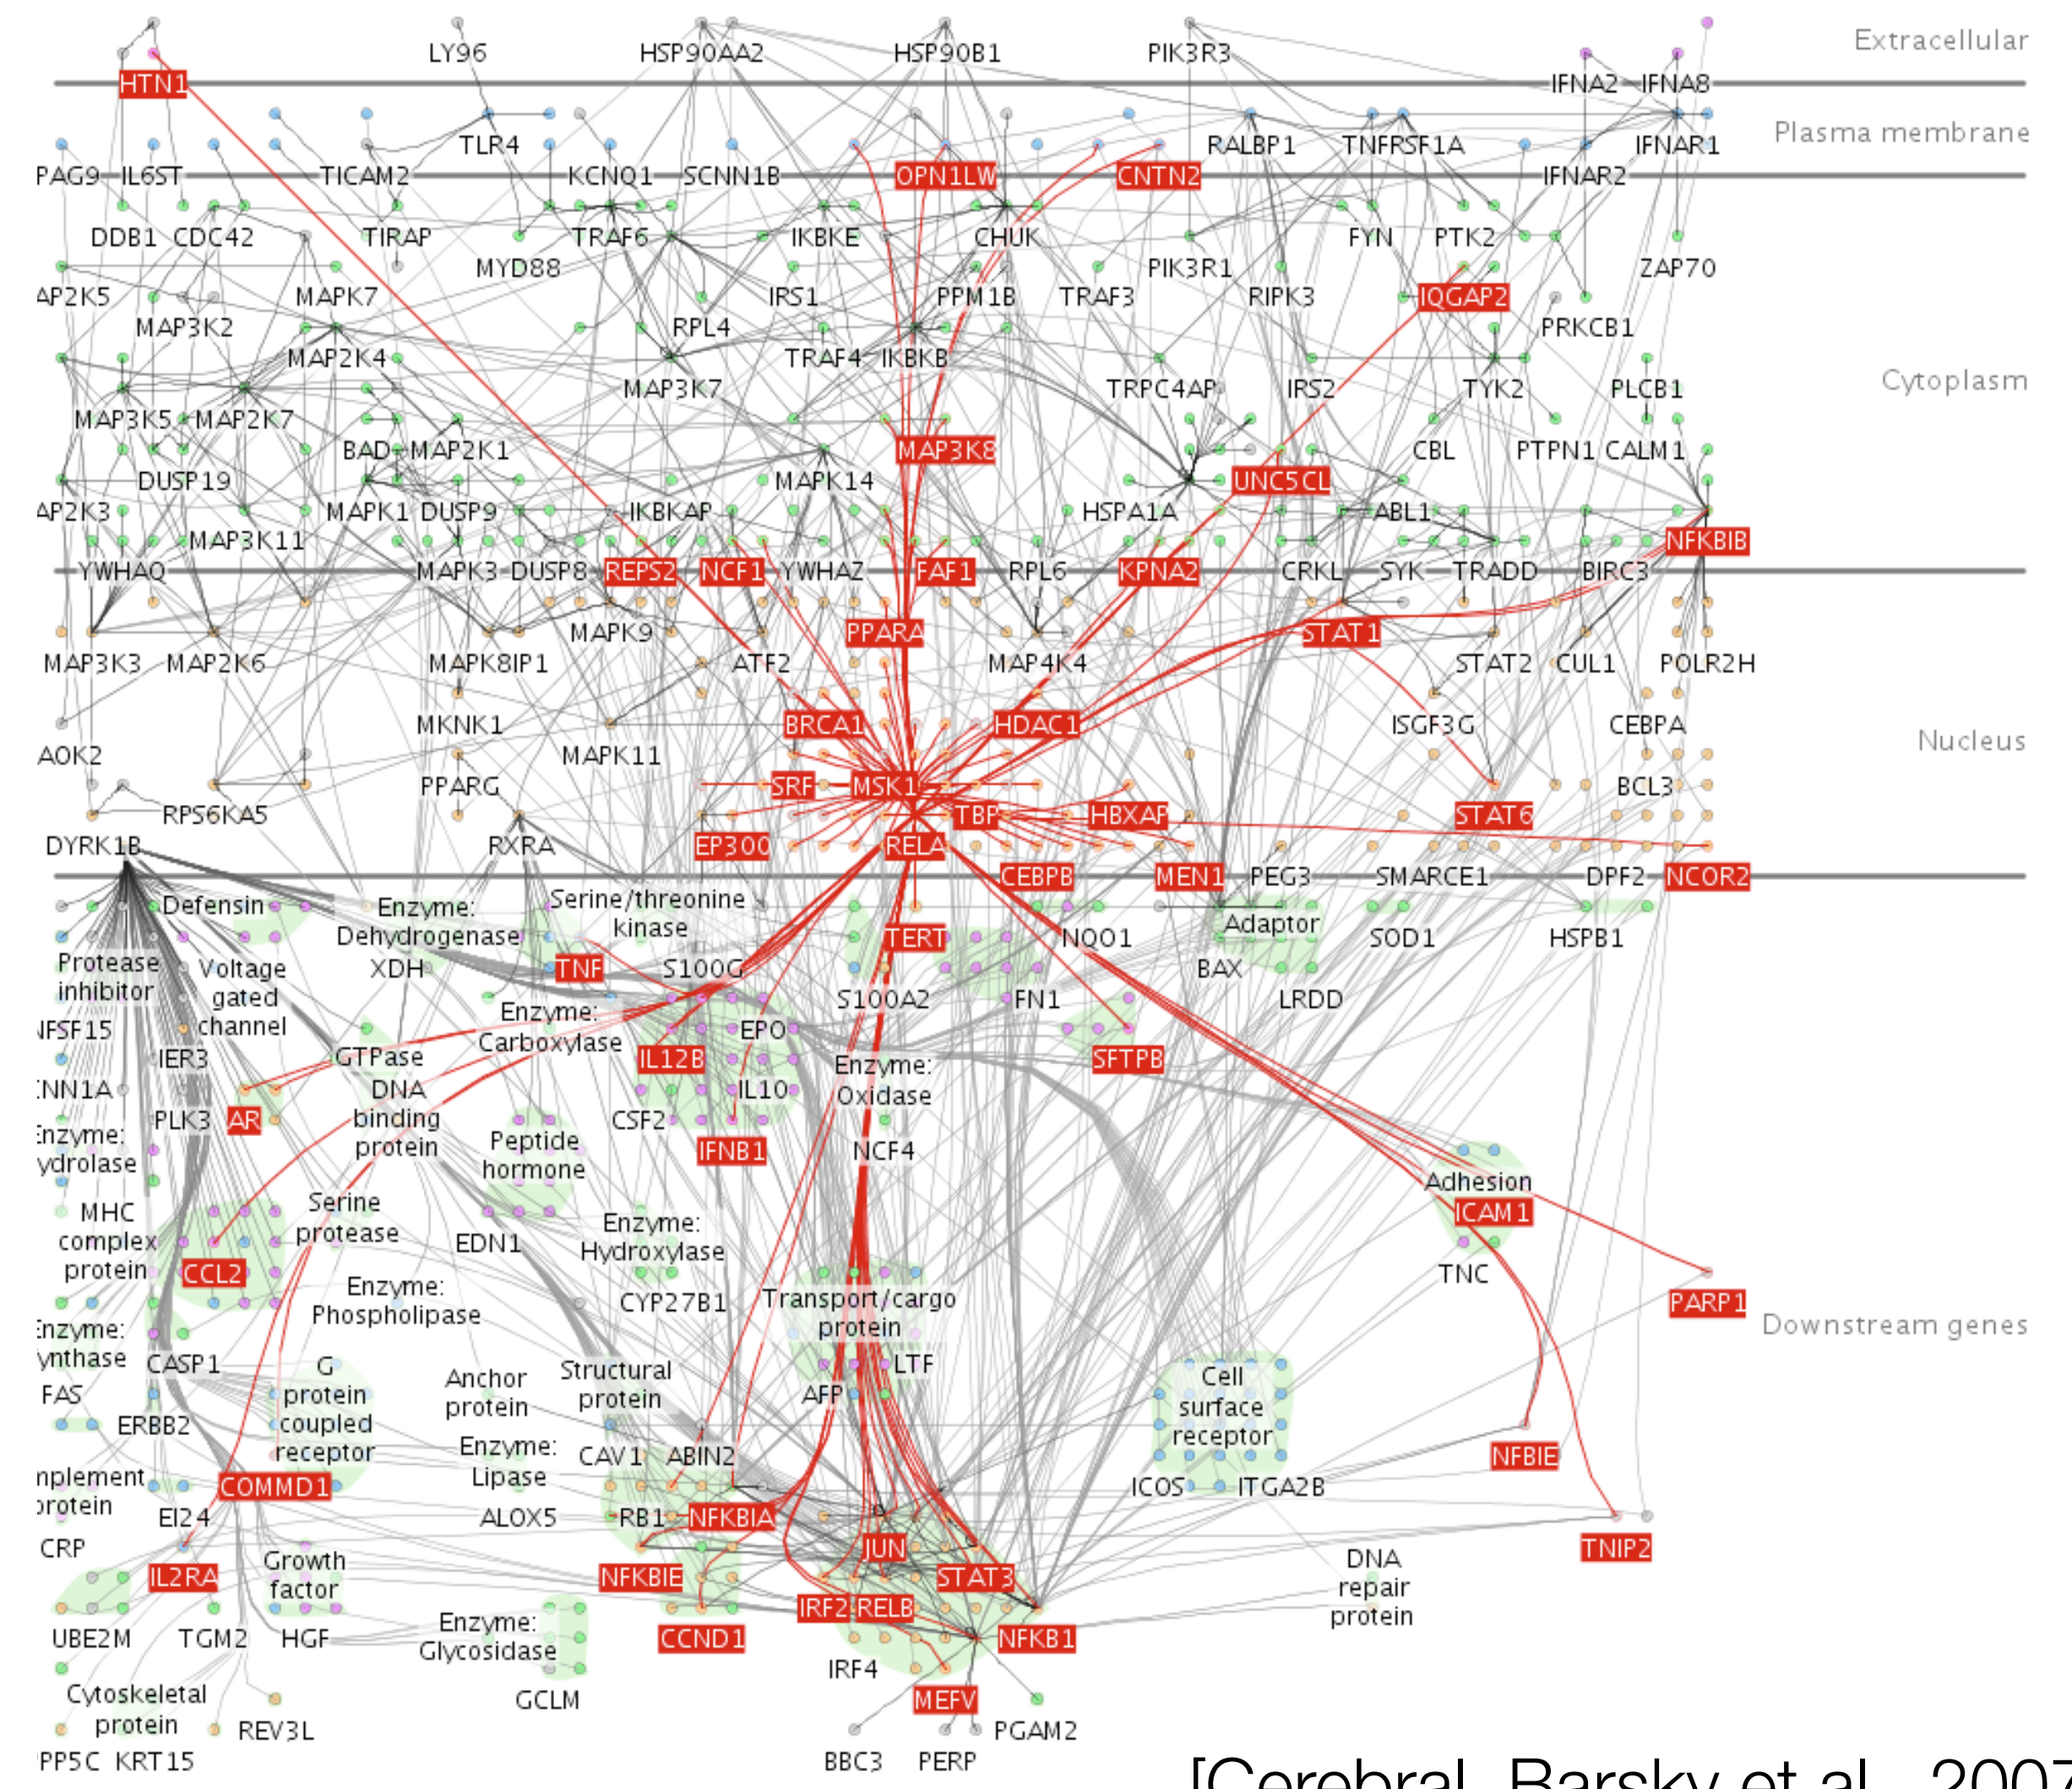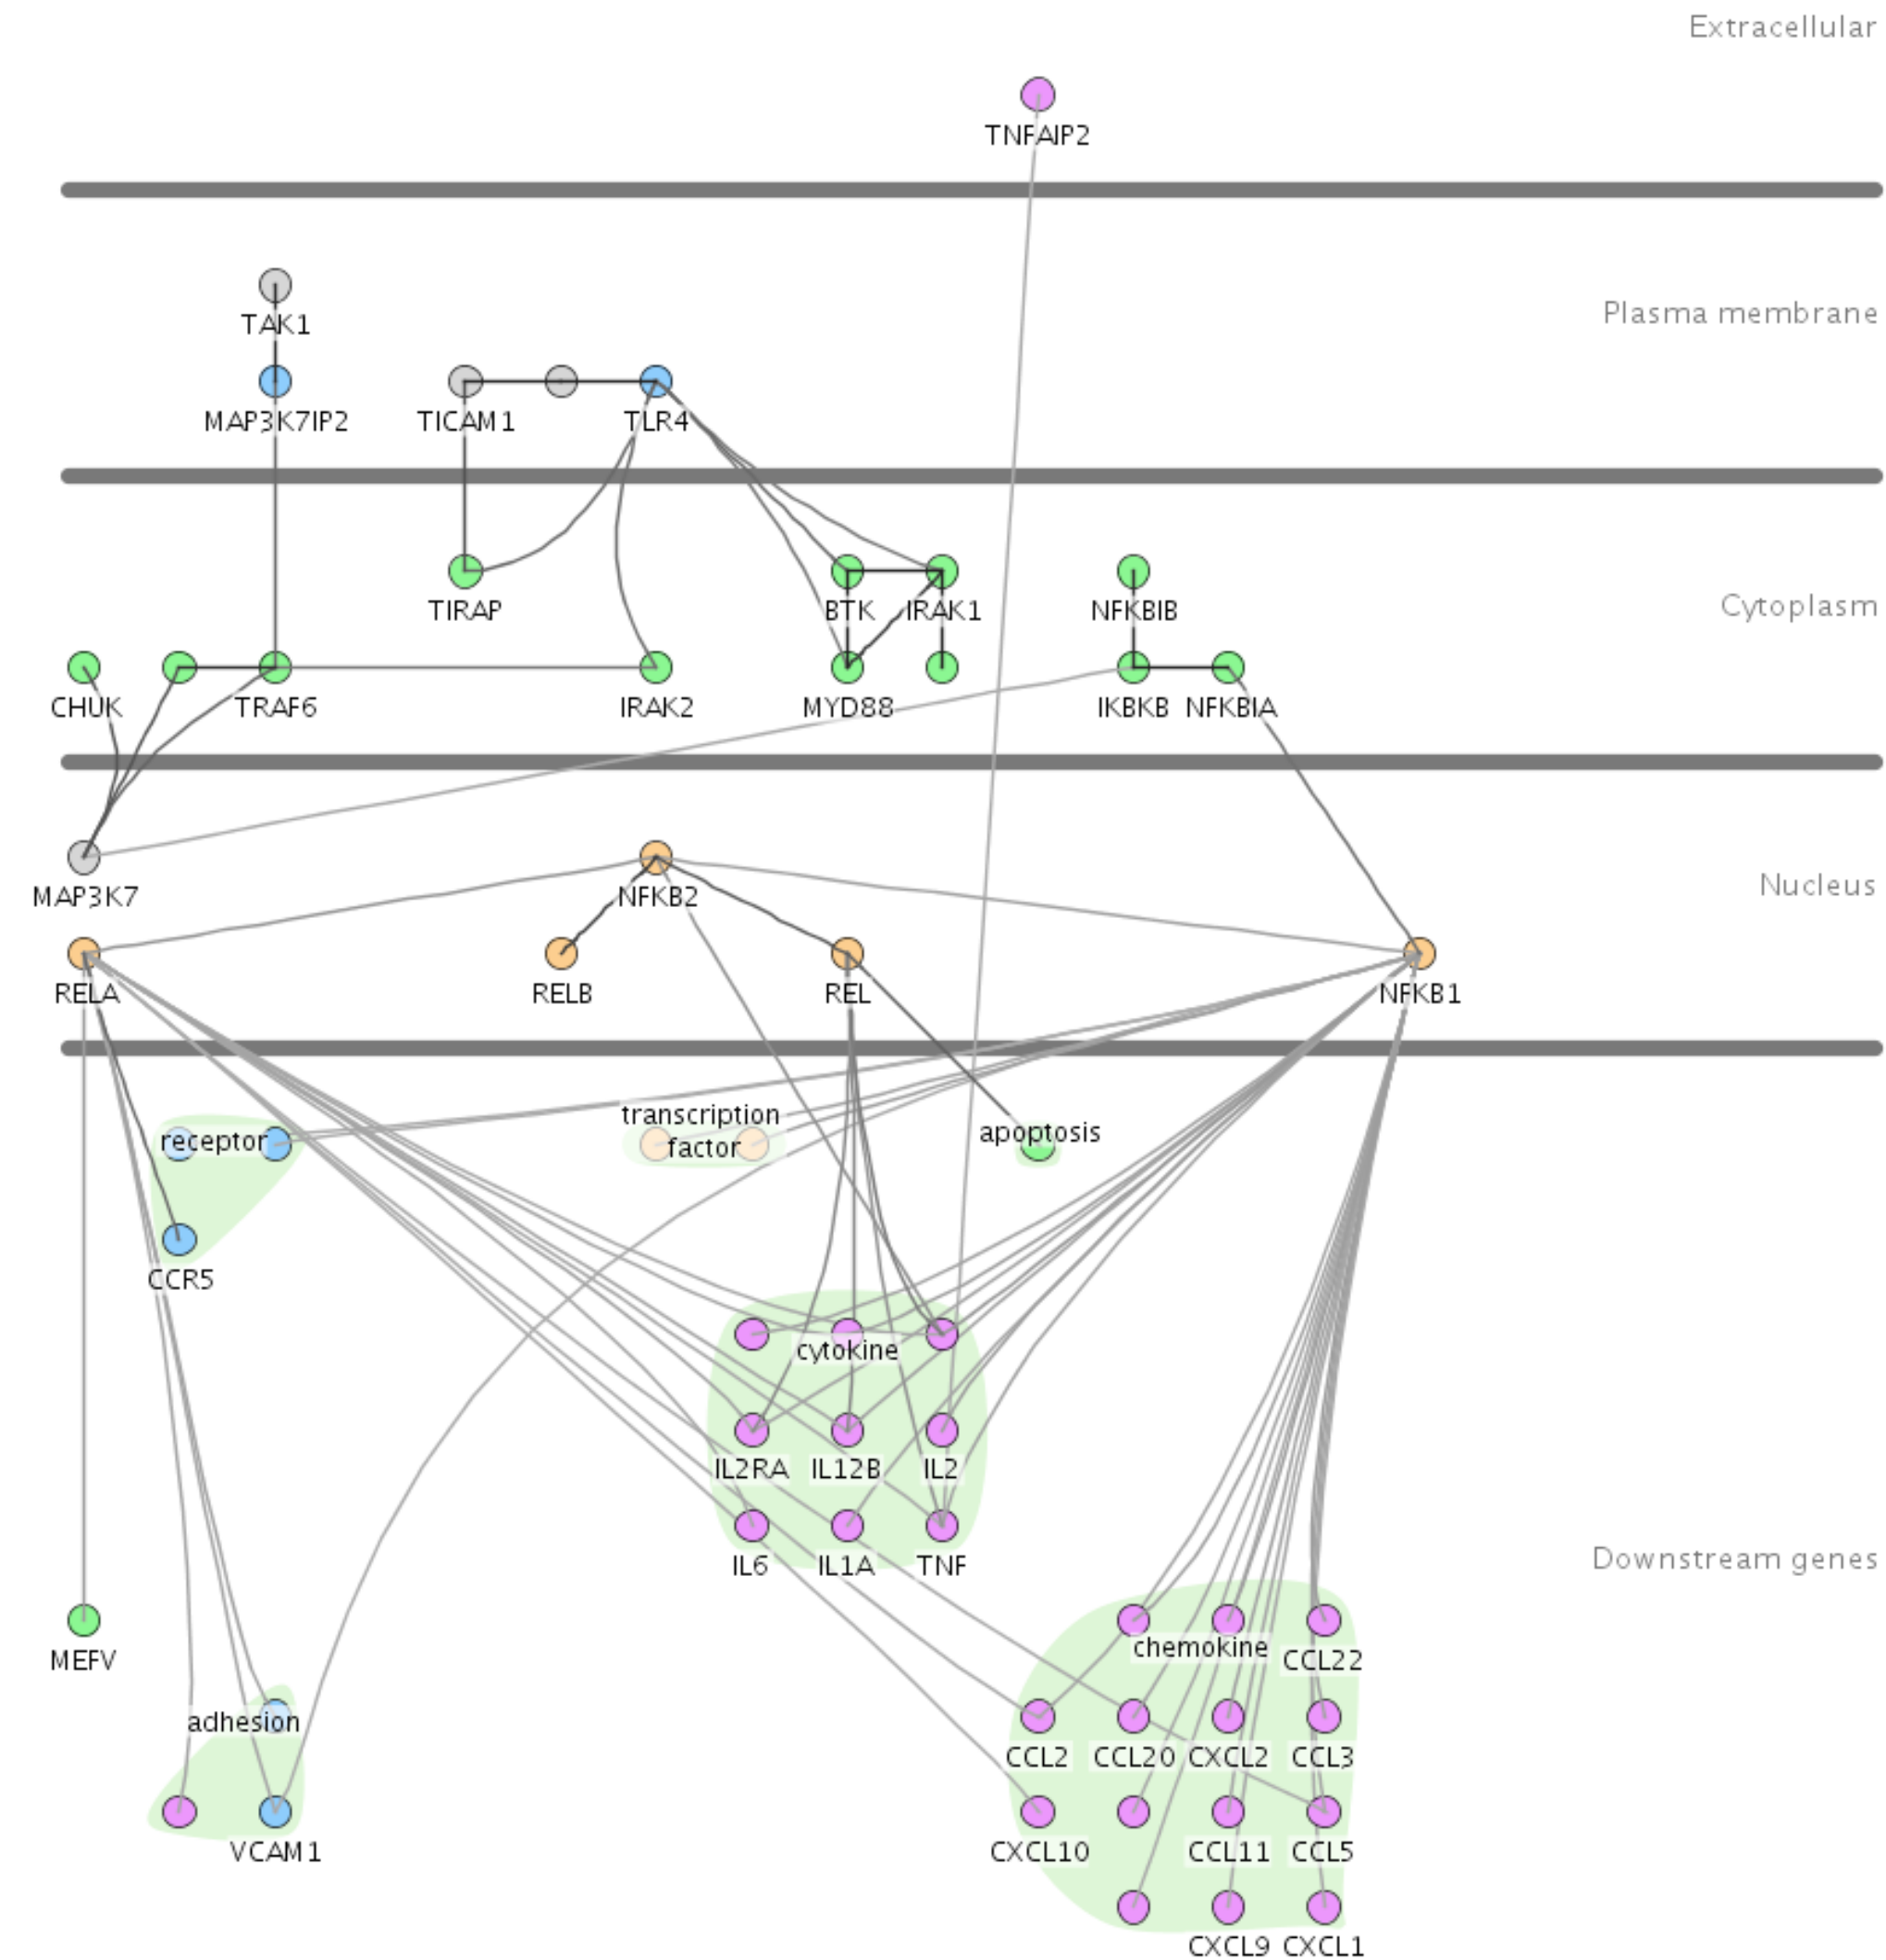





[Cerebral, Barsky et al., 2007]

Why Visual?

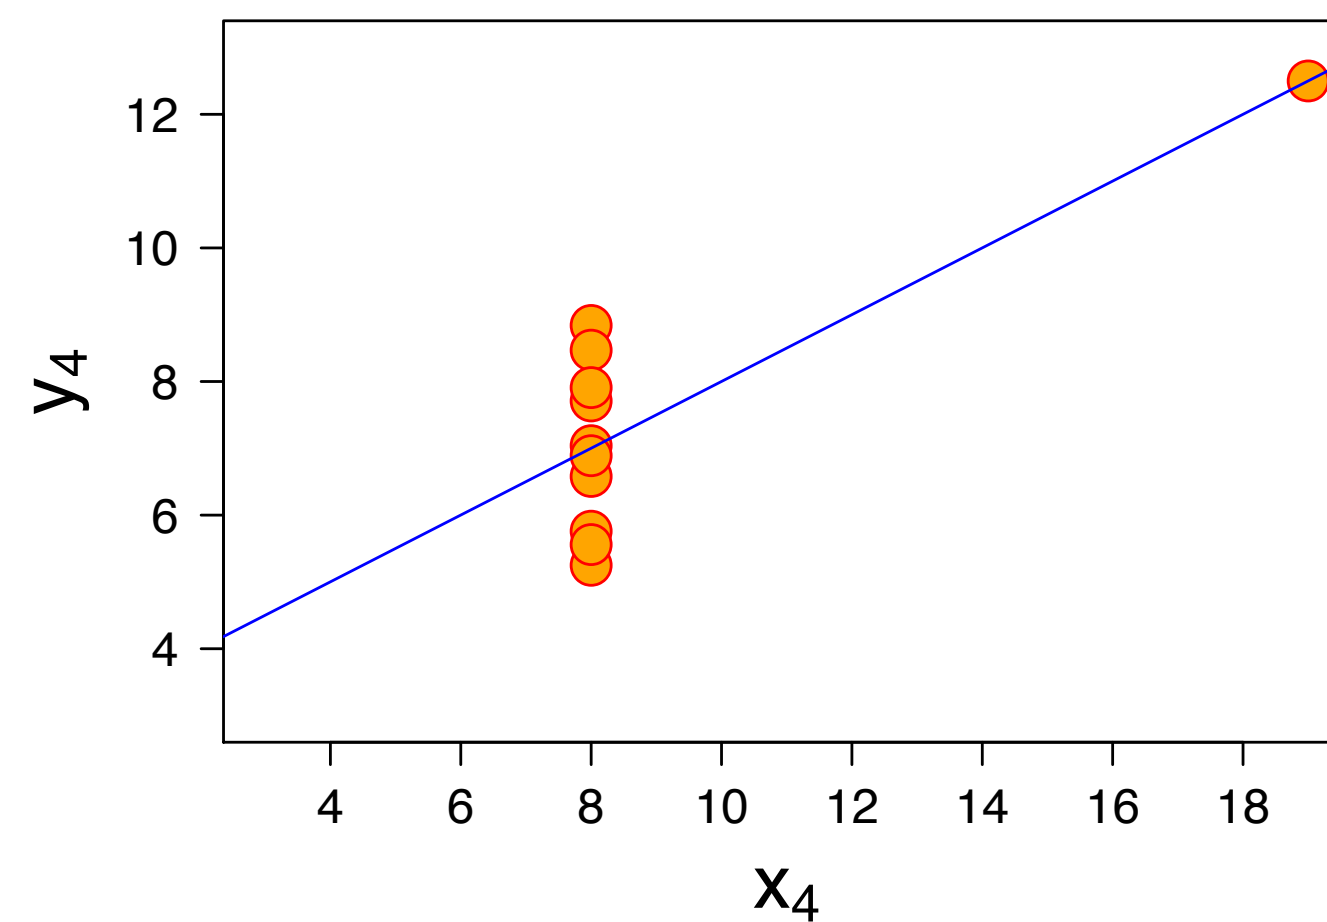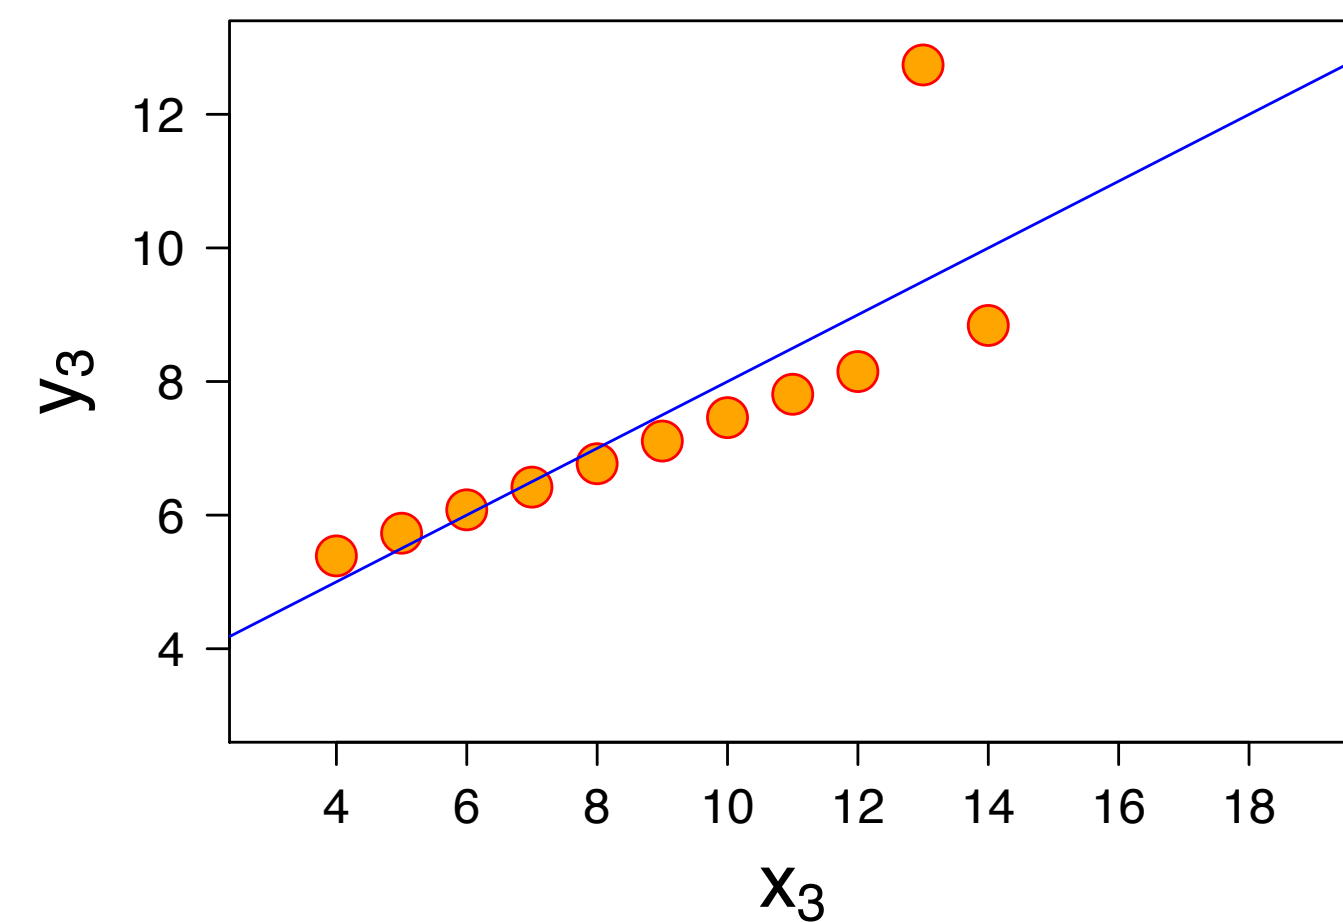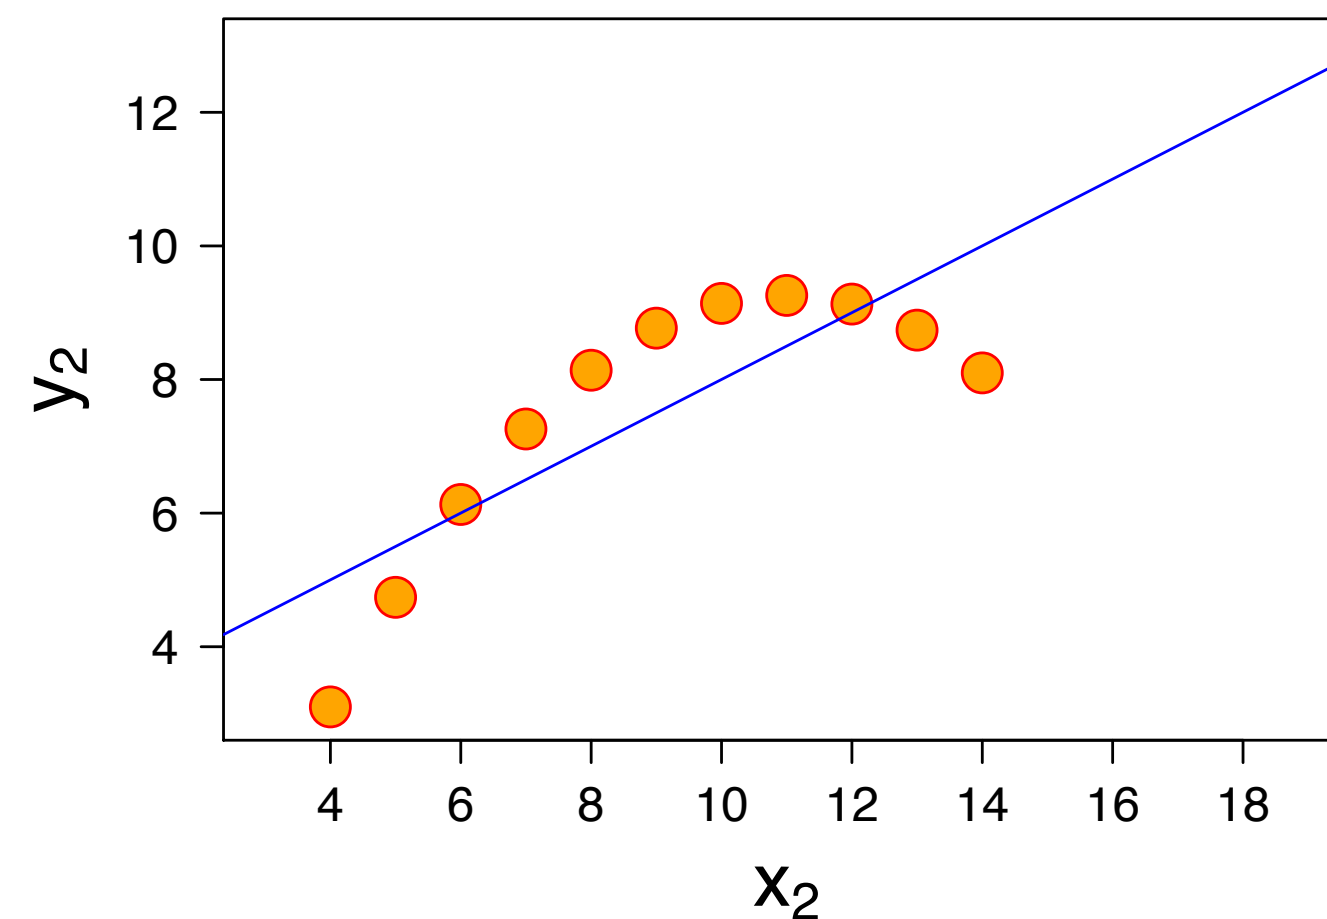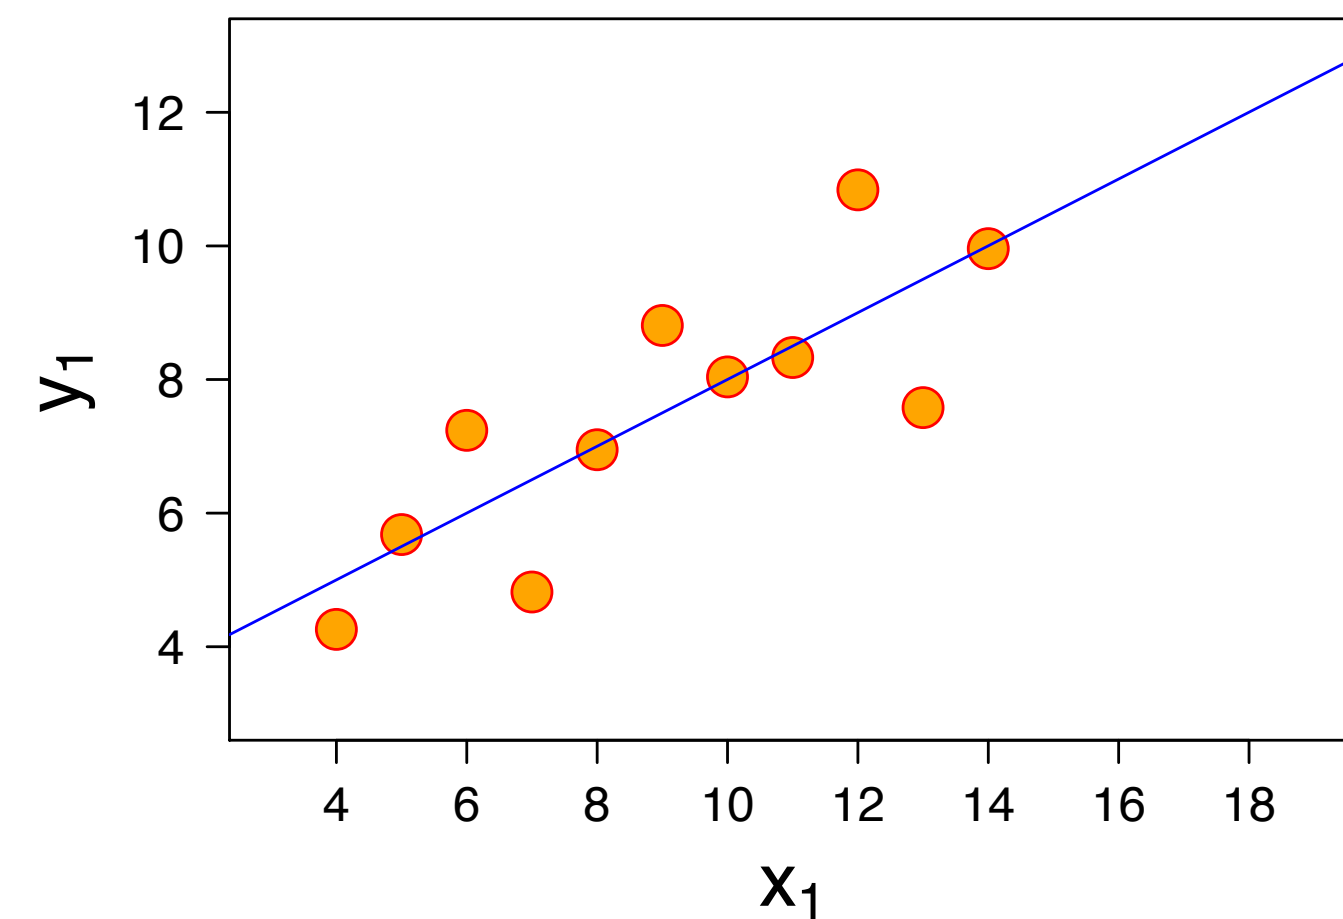

[F. J. Anscombe]


Why Visual?

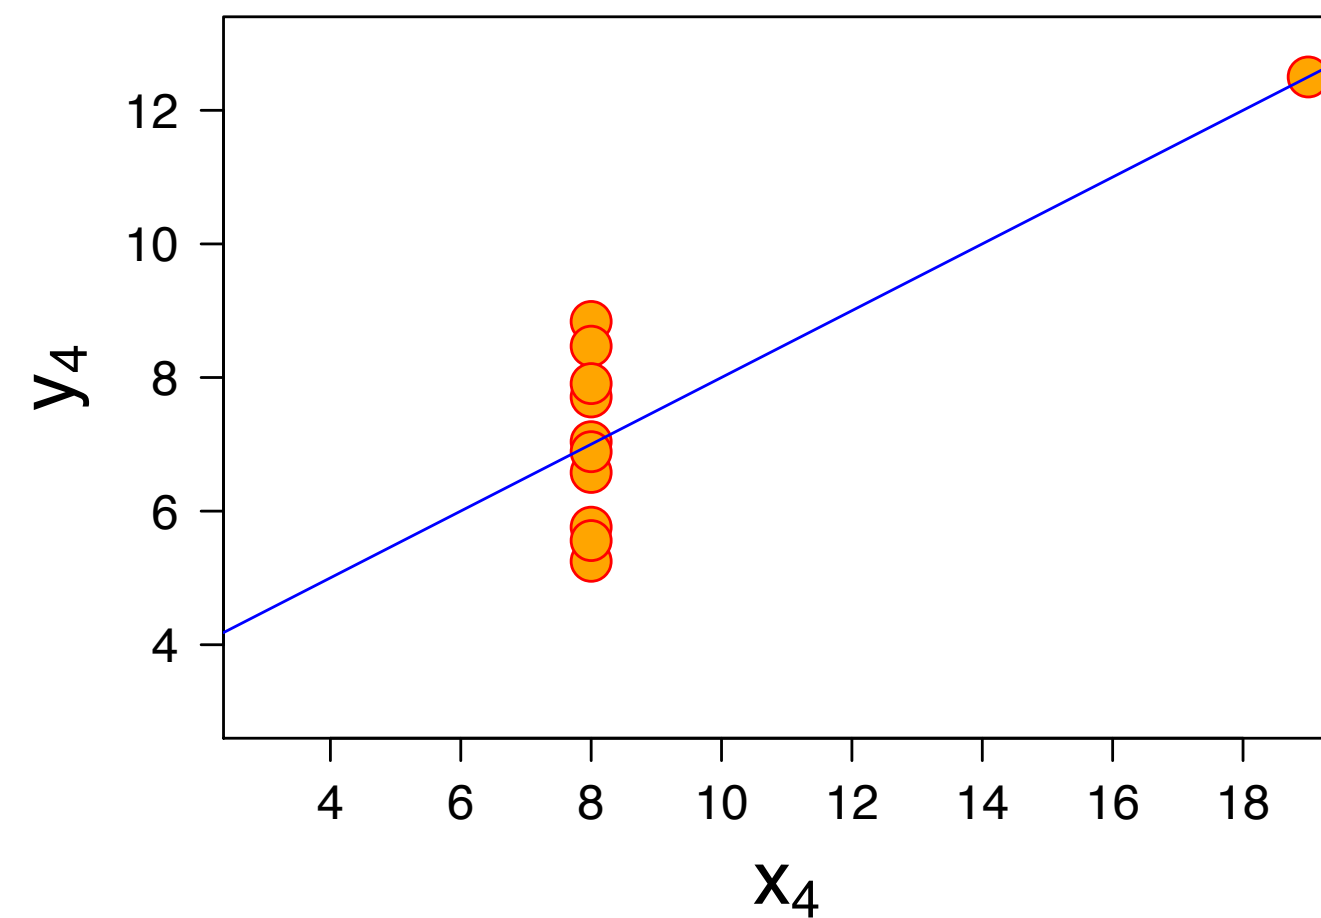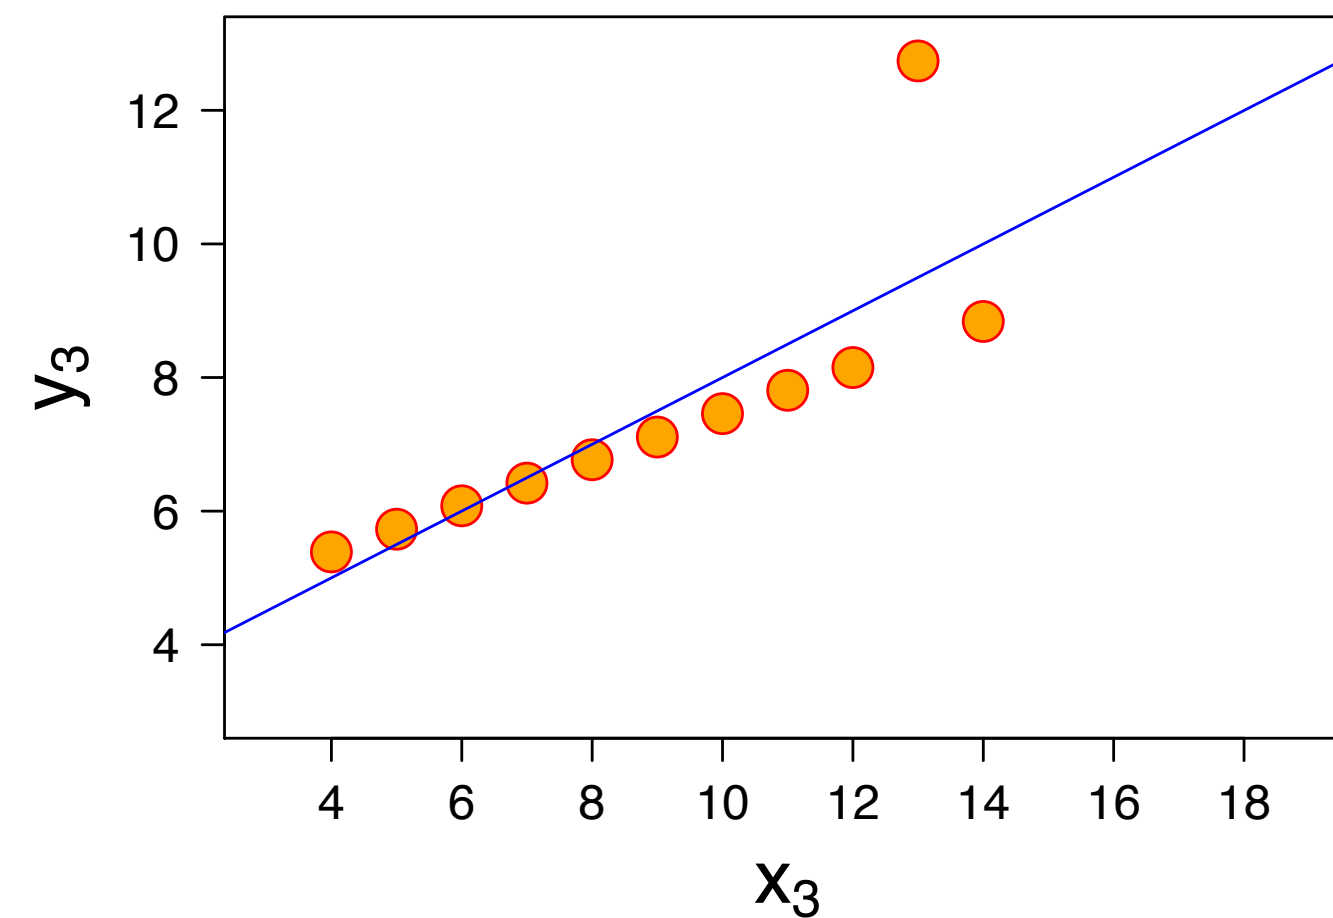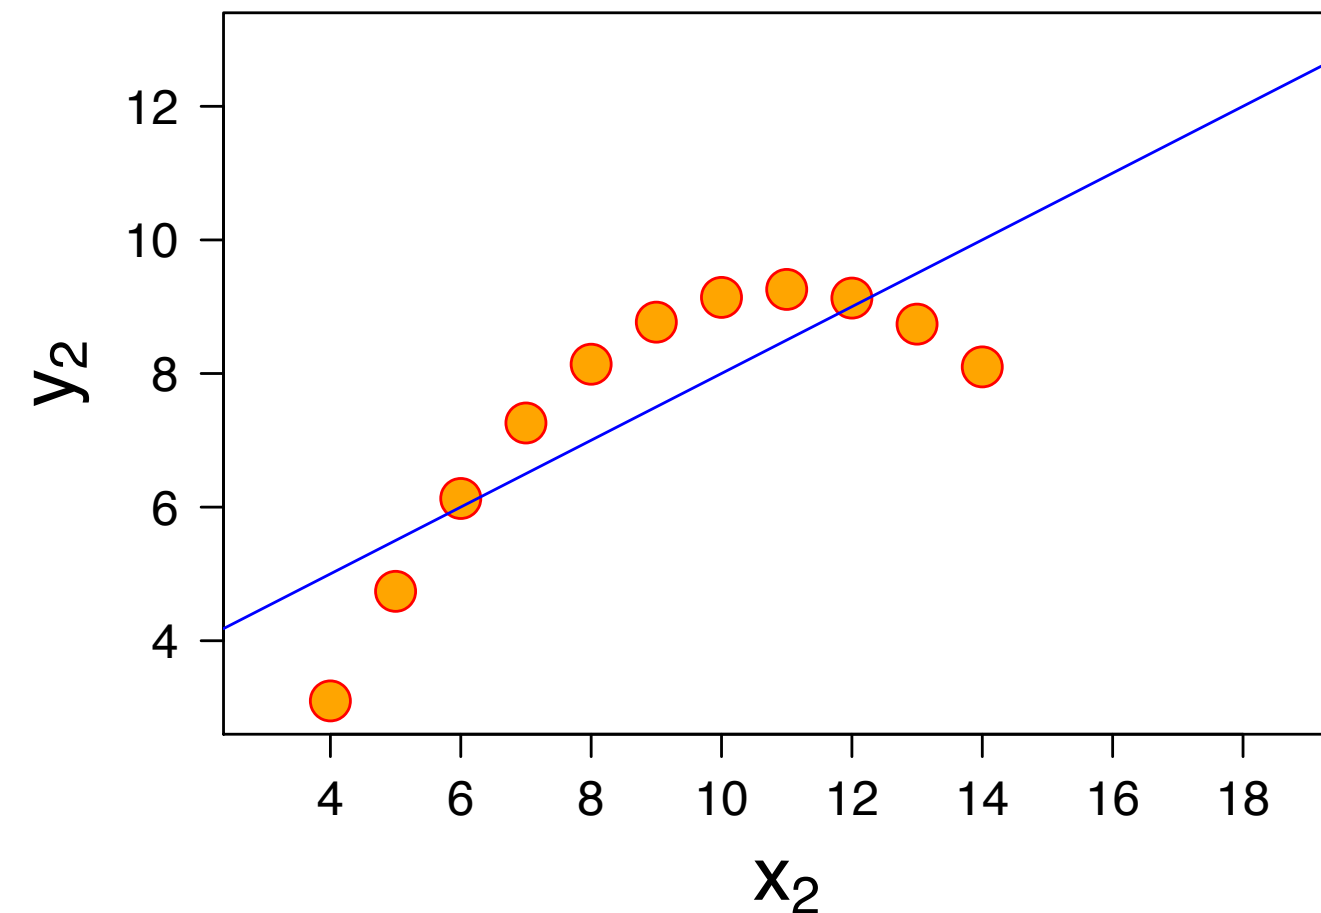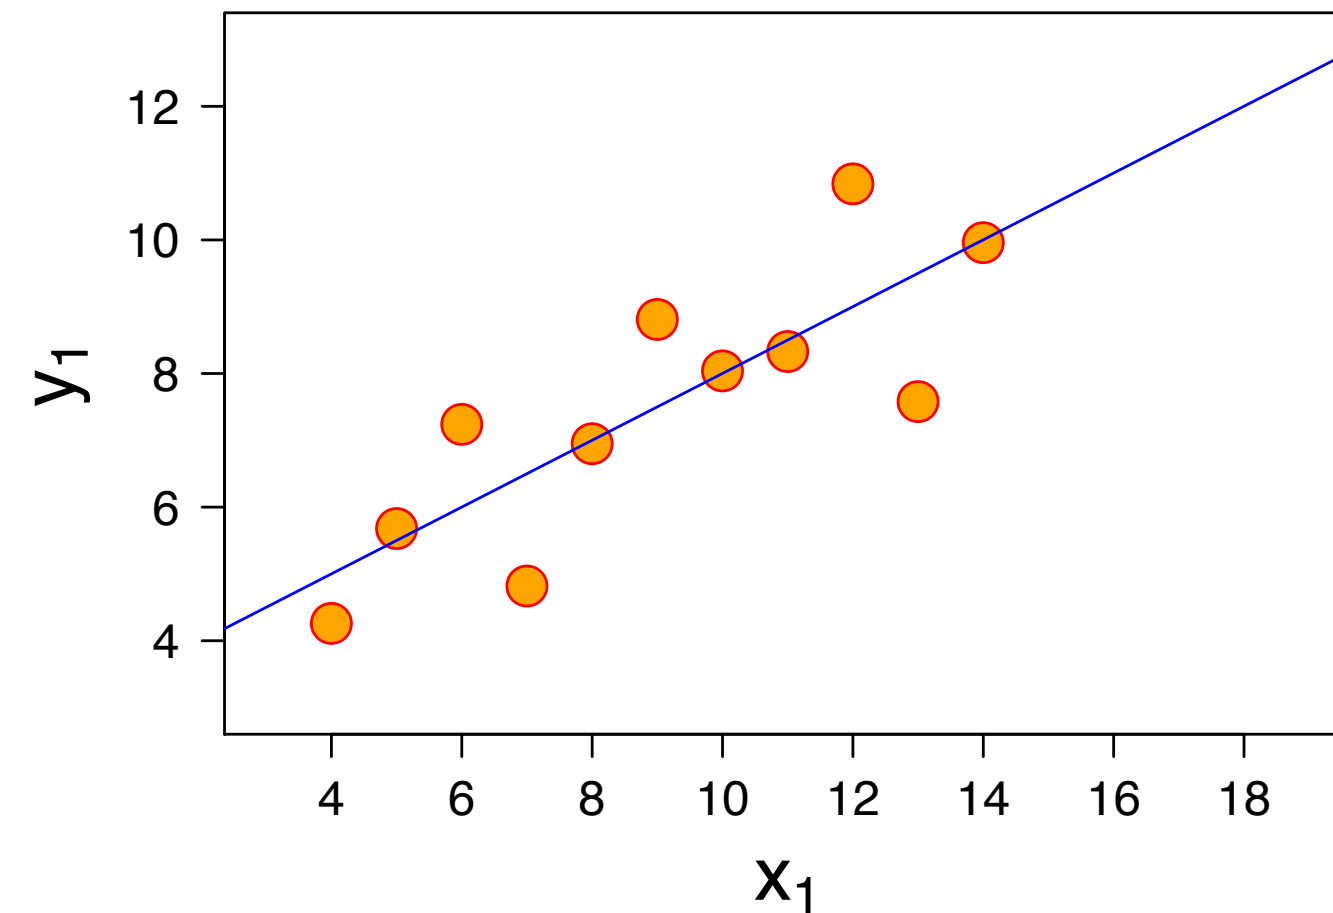

Mean of x	9
Variance of x	11
Mean of y	7.50
Variance of y	4.122
Correlation	0.816


[F. J. Anscombe]

Visual Pop-out

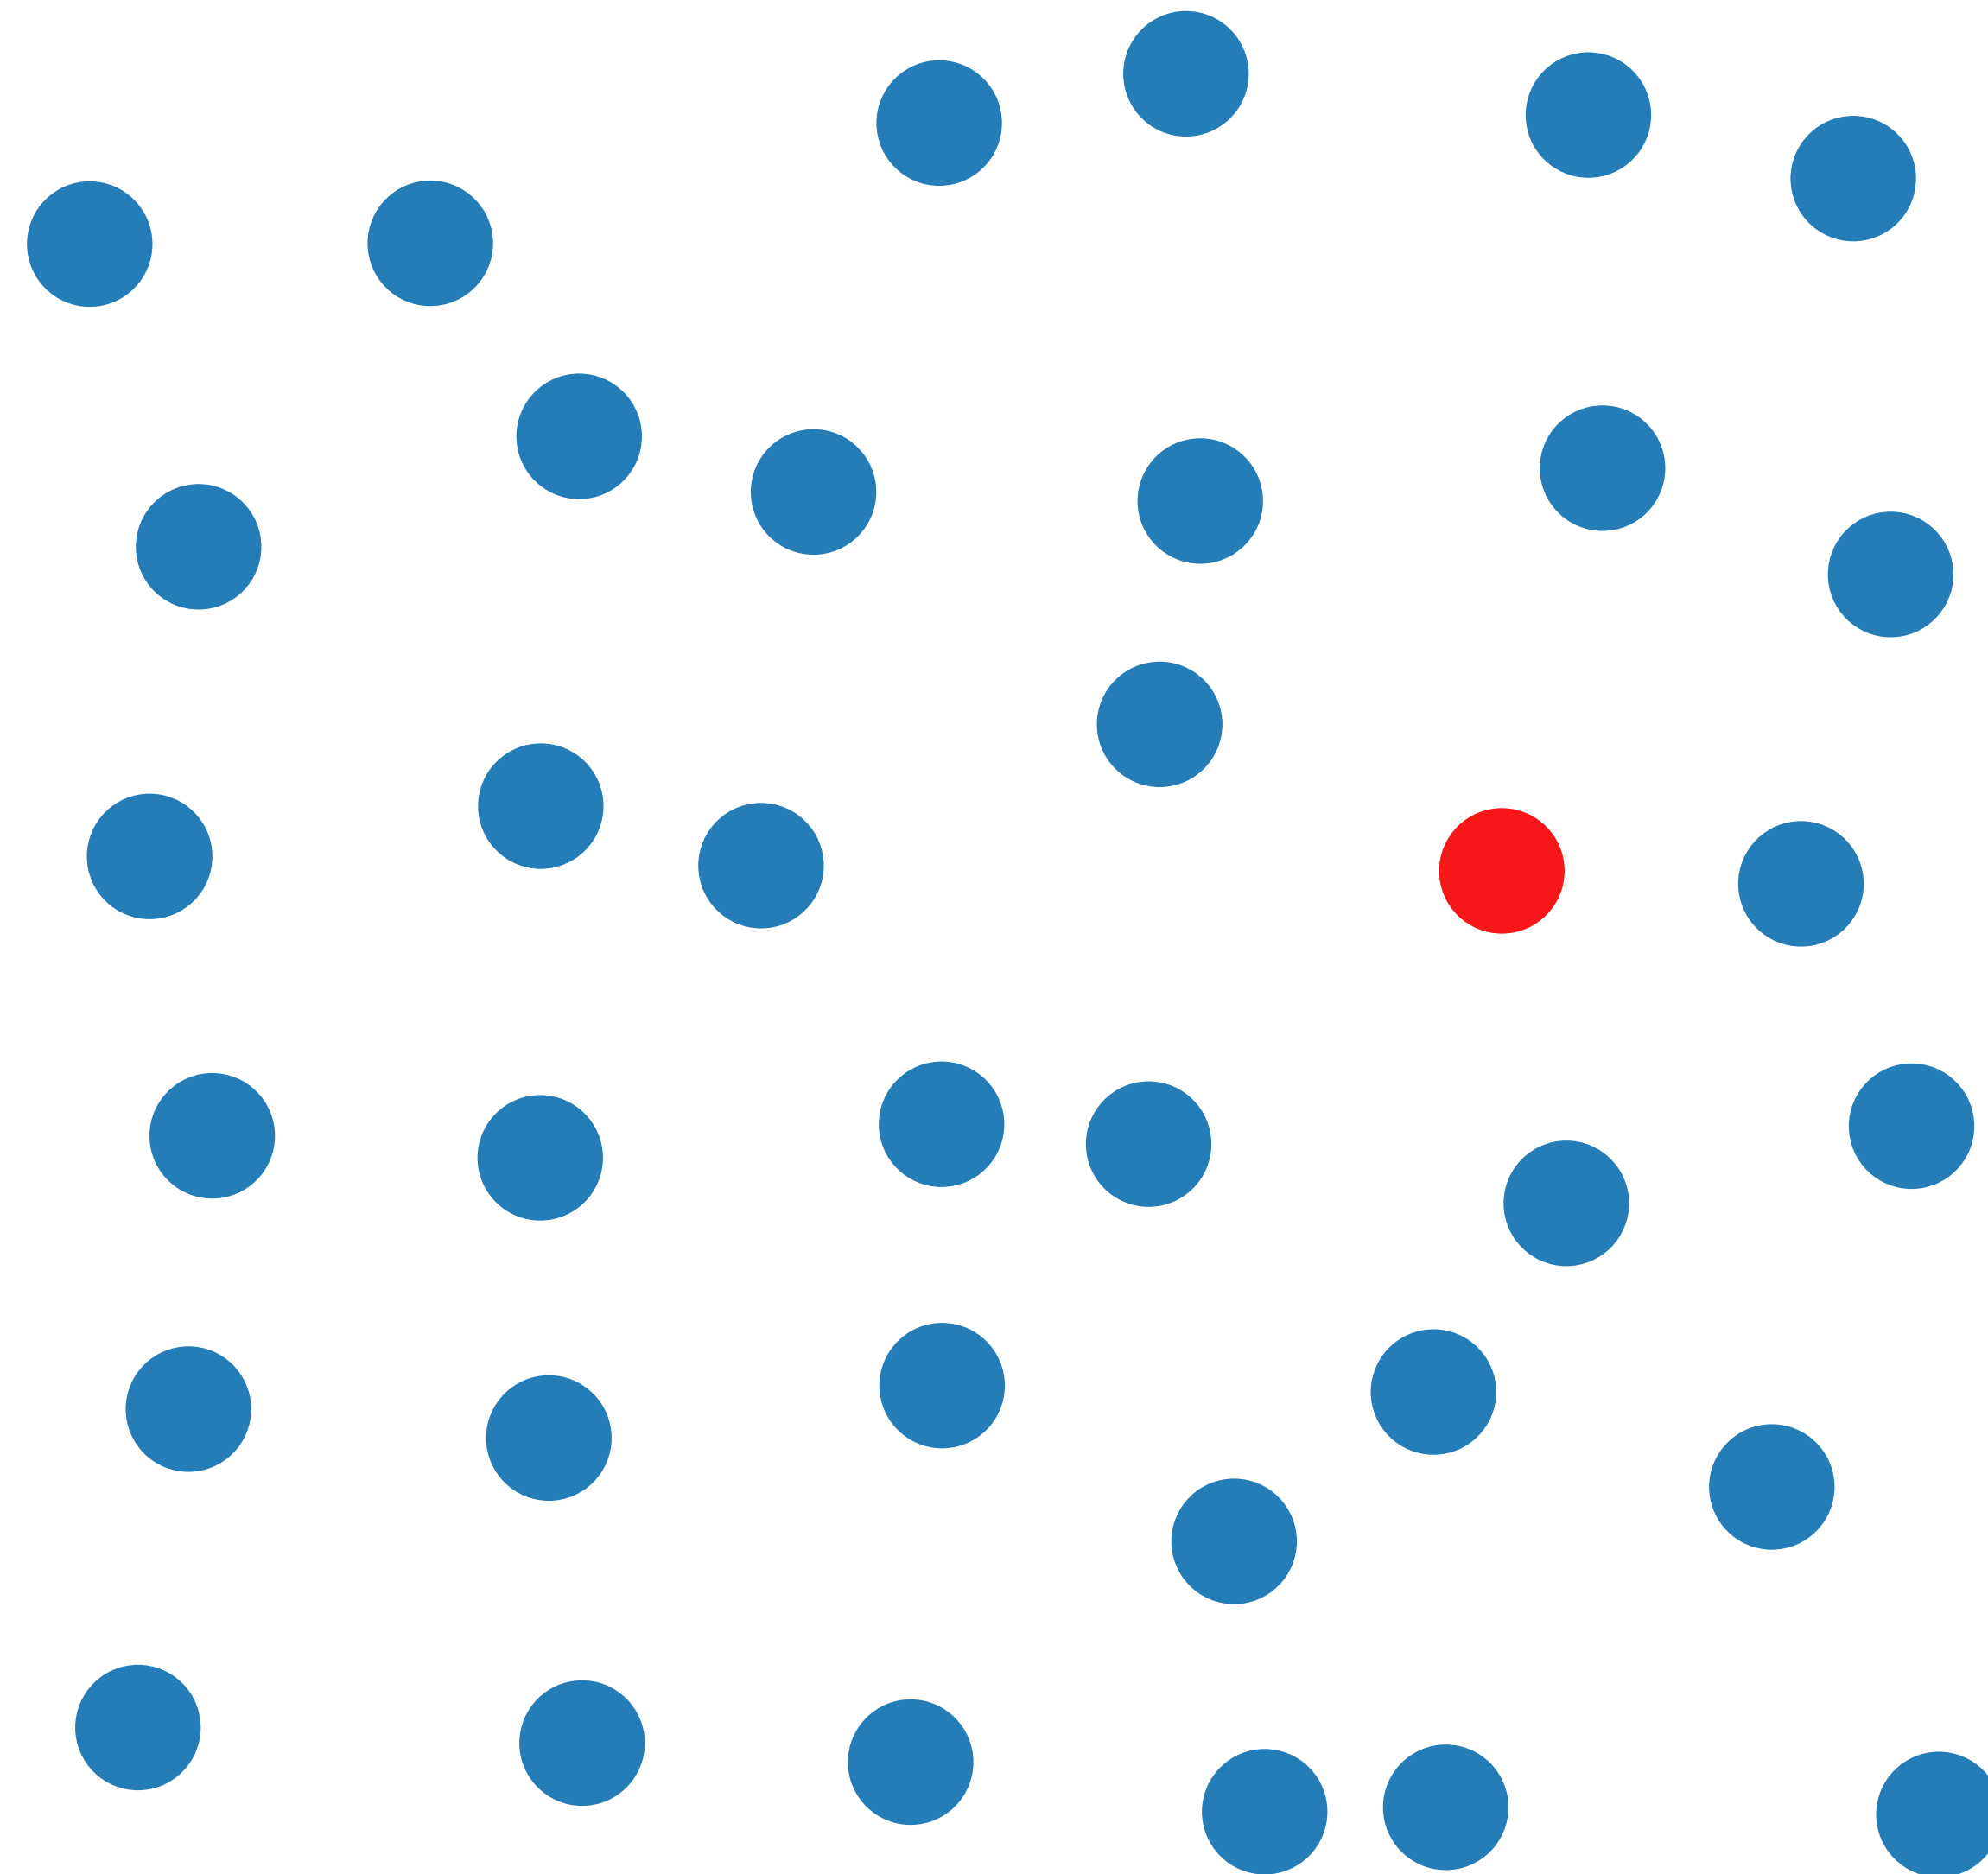

[C. G. Healey]


Visual Perception Limitations

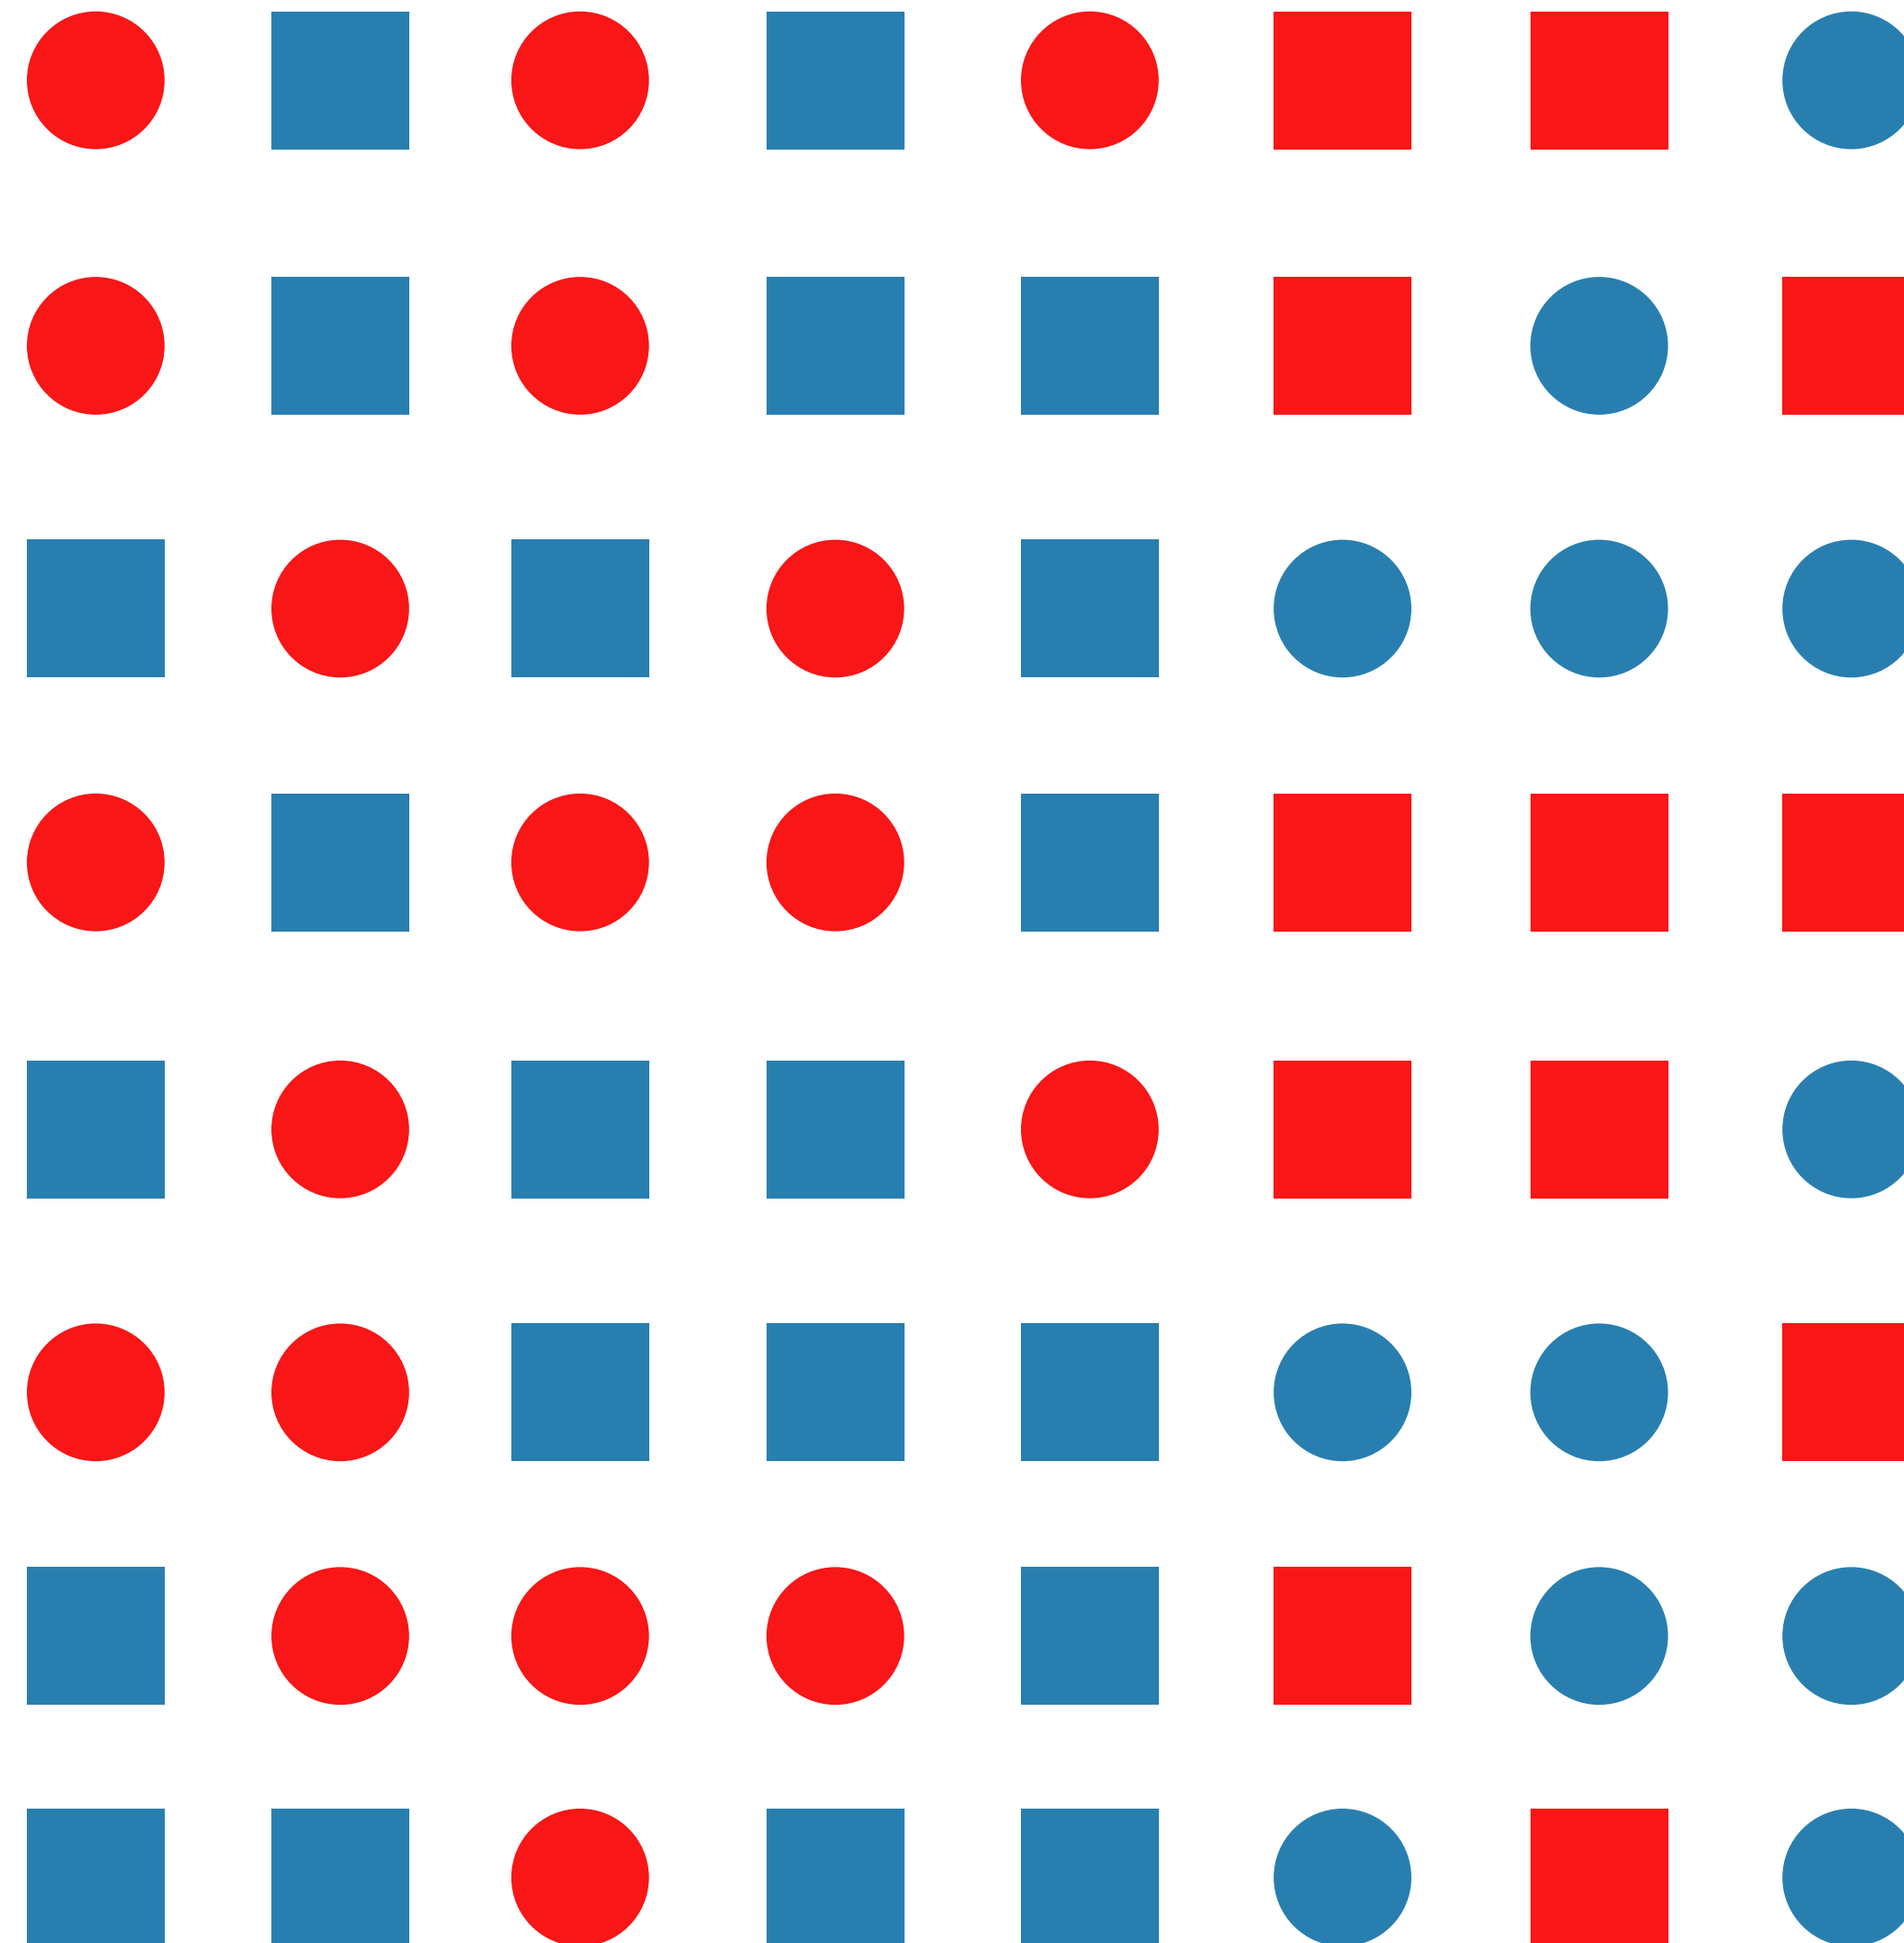

[C. G. Healey]


Assignment 1

- Write HTML, CSS, and SVG
- Use Plot library
- Text markup and styling (information)
- Drawing markup and styling (tower)
- Draw Bar chart

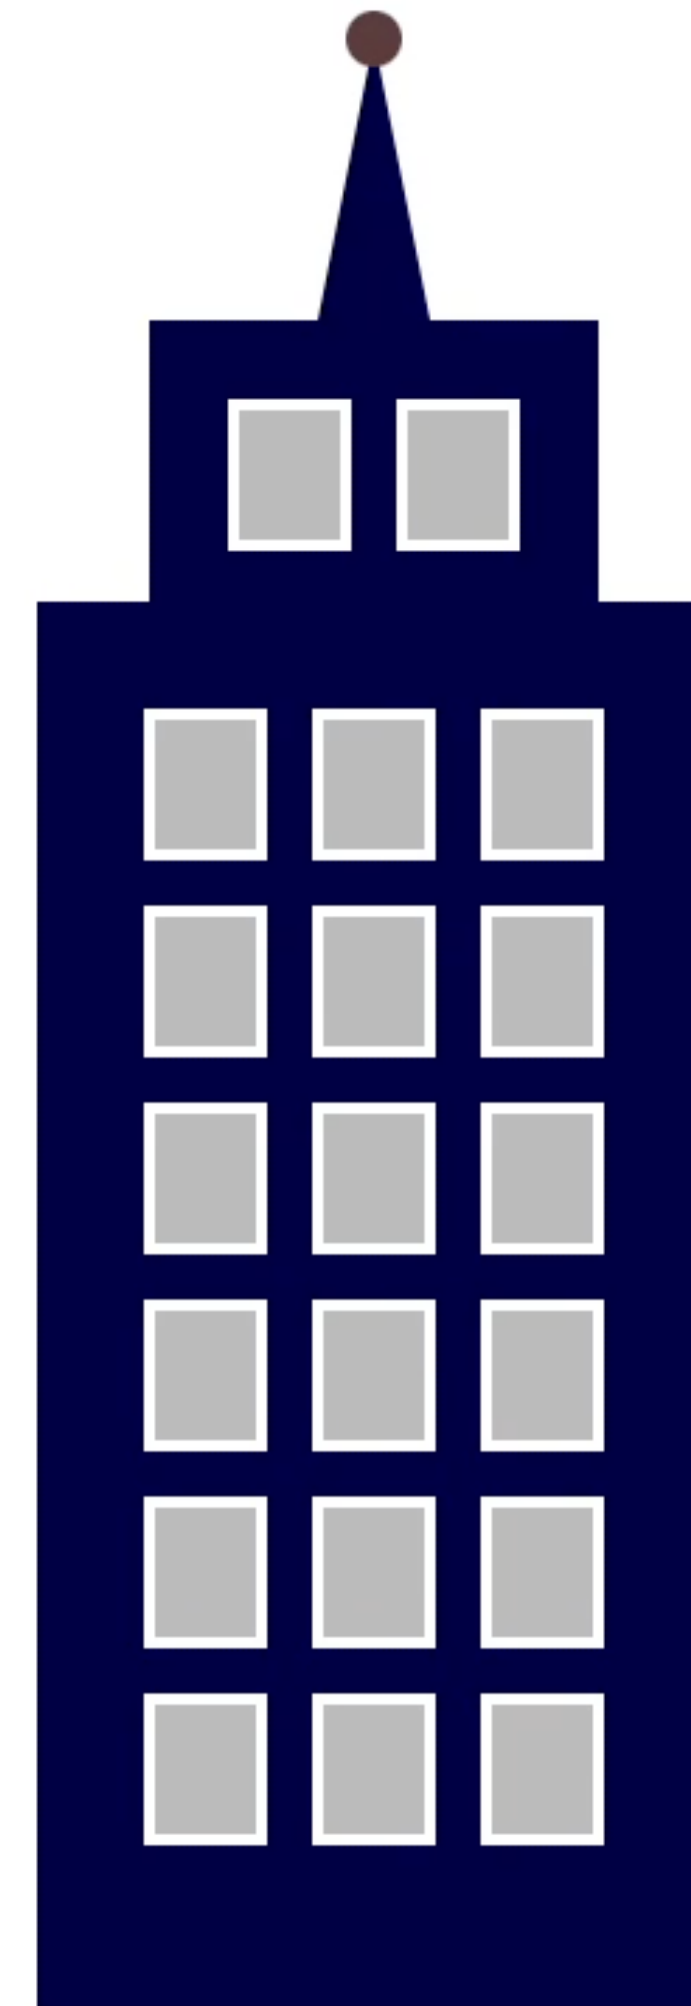

Assignment 1

- Write HTML, CSS, and SVG
- Use Plot library
- Text markup and styling (information)
- Drawing markup and styling (tower)
- Draw Bar chart

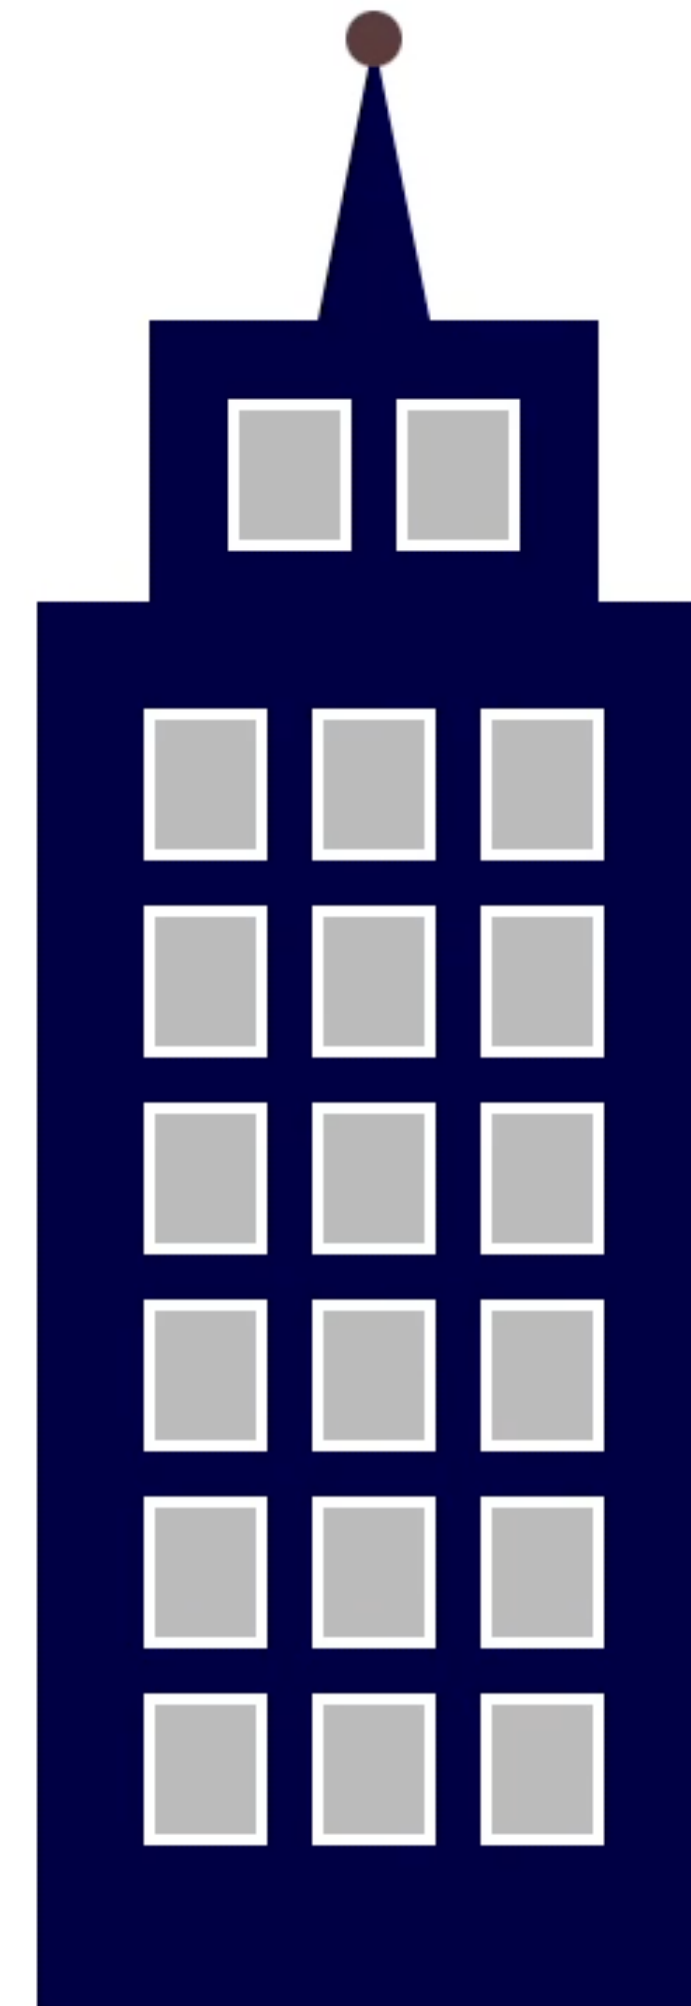

Languages of the Web

- HTML
- CSS
- SVG
- JavaScript
 - Versions of Javascript: ES6, ES2015, ES2020...
 - Specific frameworks: react, jQuery, bootstrap, Plot, D3

Observable

- Observable is a platform that allows users to create notebooks using JavaScript, Markdown, and HTML
- Strong support of data visualization (company and community interests)
- Introduction: A Taste of Observable
- Type markup/code, "execute" the cell, and results appear **above** the code
- Pin the cell to keep the code visible
- Can choose the type of cell (JavaScript, Markdown, or HTML)
- Can create an output (variable) in each cell that can be used in other cells
- Content is all **global scope!**

Other Platforms

- CodePen
- deno.land

Hyper Text Markup Language (HTML)

- Markup languages allow users to encode the **semantics** of text
- Tags define the boundaries of the structures of the content
 - Tags are enclosed in angle brackets (e.g. `<html>`)
 - Most of the time, you have a start and end tag
 - End tags are just like start tags except that they have forward slash after the open bracket (e.g. `</html>`)
 - Tags may be nested but not mismatched
 - `<p>A <strong><em>very</em></strong> cool example</p>`
 - `<p>A <strong>very <em>cool</strong></em> example</p>`
 - What about ``?

HTML Elements and Attributes

- Tags denote **elements** of the content (e.g. sections, paragraphs, images)
- Each element may have **attributes** which define other information
 - An attribute has a **key** and **value** (`key="value"`)
 - e.g. ``
- Many different elements available
 - Common: headers (`h1`, ..., `h6`), paragraph (`p`), lists (`ul`, `ol`, `li`), emphasis (`em`, `strong`), link (`a`), spans & divisions (`span`, `div`)
 - Lots more (e.g. `abbr`): see [MDN Documentation](#)
- Many different attributes available
 - See [MDN Documentation](#): note that some are legacy due to CSS

HTML Element Structure & Naming

- Elements structure a document
 - Document Object Model (DOM)
 - We can visualize this information
 - More importantly, we can **navigate** this tree
- Identifying and Classifying elements: `id` and `class` attributes
 - `id` identifies a **single** element—use for a unique case
 - `class` may identify **multiple** elements—use for common cases
 - Each element may have multiple classes, separate by spaces
 - Use normal identifiers: don't start the name with a number

Other HTML Trivia

- `<`, `>`, `&`, and `"` are special characters, escape with `<`, `>`, `&`, and `"`; (note the semi-colon)
- Comments are enclosed by `<!--` and `-->`
 - `<!-- This is a comment -->`
- HTML Documents begin with a `DOCTYPE` declaration
 - For HTML5, this is easier `<!DOCTYPE html>`
- meta tag: `<meta charset="UTF-8"/>`
- HTML has audio and video tags, math equation support, and more

Basic HTML File

```
<!DOCTYPE html>
<html>
  <head>
    <title>A Basic Web Page</title>
  </head>
  <body>
    <h1>Da Bears</h1>
    <p><em>This is <strong>cool</strong>. What about
<u><strong>this?</strong></u></em></p>
    
  </body>
</html>
```

Basic HTML File

```
<!DOCTYPE html>
<html>
  <head>
    <title>A Basic Web Page</title>
  </head>
  <body>
```

```
    <h1>Da Bears</h1>
    <p><em>This is <strong>cool</strong>. What about
<u><strong>this?</strong></u></em></p>
    
  </body>
</html>
```

In many environments (e.g. Observable), only need this part

What is CSS?

Cascading Style Sheets (CSS)

- Separate from content, just specifies how to style the content
- Style information can appear in three places:
 - External file
 - In a style element at the beginning of the HTML file
 - In a specific element in the body of a document (least preferable)
- Why Cascading?
 - Don't want to have to specify everything over and over
 - Often want to use the same characteristics in a region of the DOM
 - Use inheritance: properties that apply to children cascade down

CSS Selectors

- How do we specify what part(s) of the page we want to style?
- The **element types** themselves (the HTML tag)
 - `strong { color: red; }`
- **Classes** of elements (ties to HTML `class` attribute)
 - `.cool { color: blue; }`
- A **specific** element (ties to HTML `id` attribute)
 - `#main-section { color: green; }`
- Relationships
 - Descendant: `p em { color: yellow; }`
 - Child: `p > em { color: orange; }`
- Pseudo-classes: `a:hover { color: purple; }`

Other CSS Bits

- Comments: `/* This is a comment in CSS */`
- Grouping Selectors: `p, li { font-size: 12pt; }`
- Multiple Classes: `.cool.temp { color: blue; }`
- Colors:
 - Names (Level 1, 2, & 3): `red, orange, antiquewhite`
 - Dash notation (3- & 6-character): `#fff, #00ff00`
 - Integer or % RGB and HSL Functions: `rgb( 255, 0, 0),`
`rgb(50%, 50%, 0%), hsl(120, 100%, 50%)`
 - Also `background-color`
- Watch out for multiple rules (look at how a web browser parses)
- Again, much more documentation at [MDN](https://developer.mozilla.org/en-US/docs/Web/CSS)

Example CSS

```
body {  
    font-face: sans-serif;  
    font-size: 12pt;  
}  
em { color: green; }  
em u { color: red; }  
em > strong { color: blue; }  
img { border: 4px solid red; }
```

- What colors are displayed for this HTML (with the above stylesheet)?
 - `This is cool. What about
<u>this?</u>`

CSS Specificity

- Example:
 - CSS:

```
p.exciting { color: red; }  
p { color: blue; }
```
 - What is the color of the paragraph
`<p class="exciting">Cool</p>?`
- Generally, last rule listed overrides previous rules
- ...but anytime a selector is **more specific**, it has precedence
- `p.exciting` is a more specific selector
- When in doubt, **test it** in a browser

How to add CSS to HTML

- External: a separate file via a link element (in the <head> section):
 - `<link rel="stylesheet" href="styles.css">`
- Embedded: in the header:
 - `<style type="text/css"> ... </style>`
- Inline: for a specific element: (**Discouraged!**)
 - `<p style="font-weight: bold;">Some text</p>`


Observable

- Style rules are **global**
- Make sure you scope the rules
 - Add a `<style>` block to the cell for the rules for that cell
 - Put everything in a `<div>` with an `id` attribute
 - `<div id="mydiv">...</div>`
 - CSS rules should start with the div id unless you want to have rules apply to the entire notebook
 - `#mydiv p { font-family: sans-serif };`

What is the difference between
vector and raster graphics?


Scalable Vector Graphics (SVG)

- Vector graphics vs. Raster graphics
- Drawing commands versus a grid of pixels
- Why vector graphics?

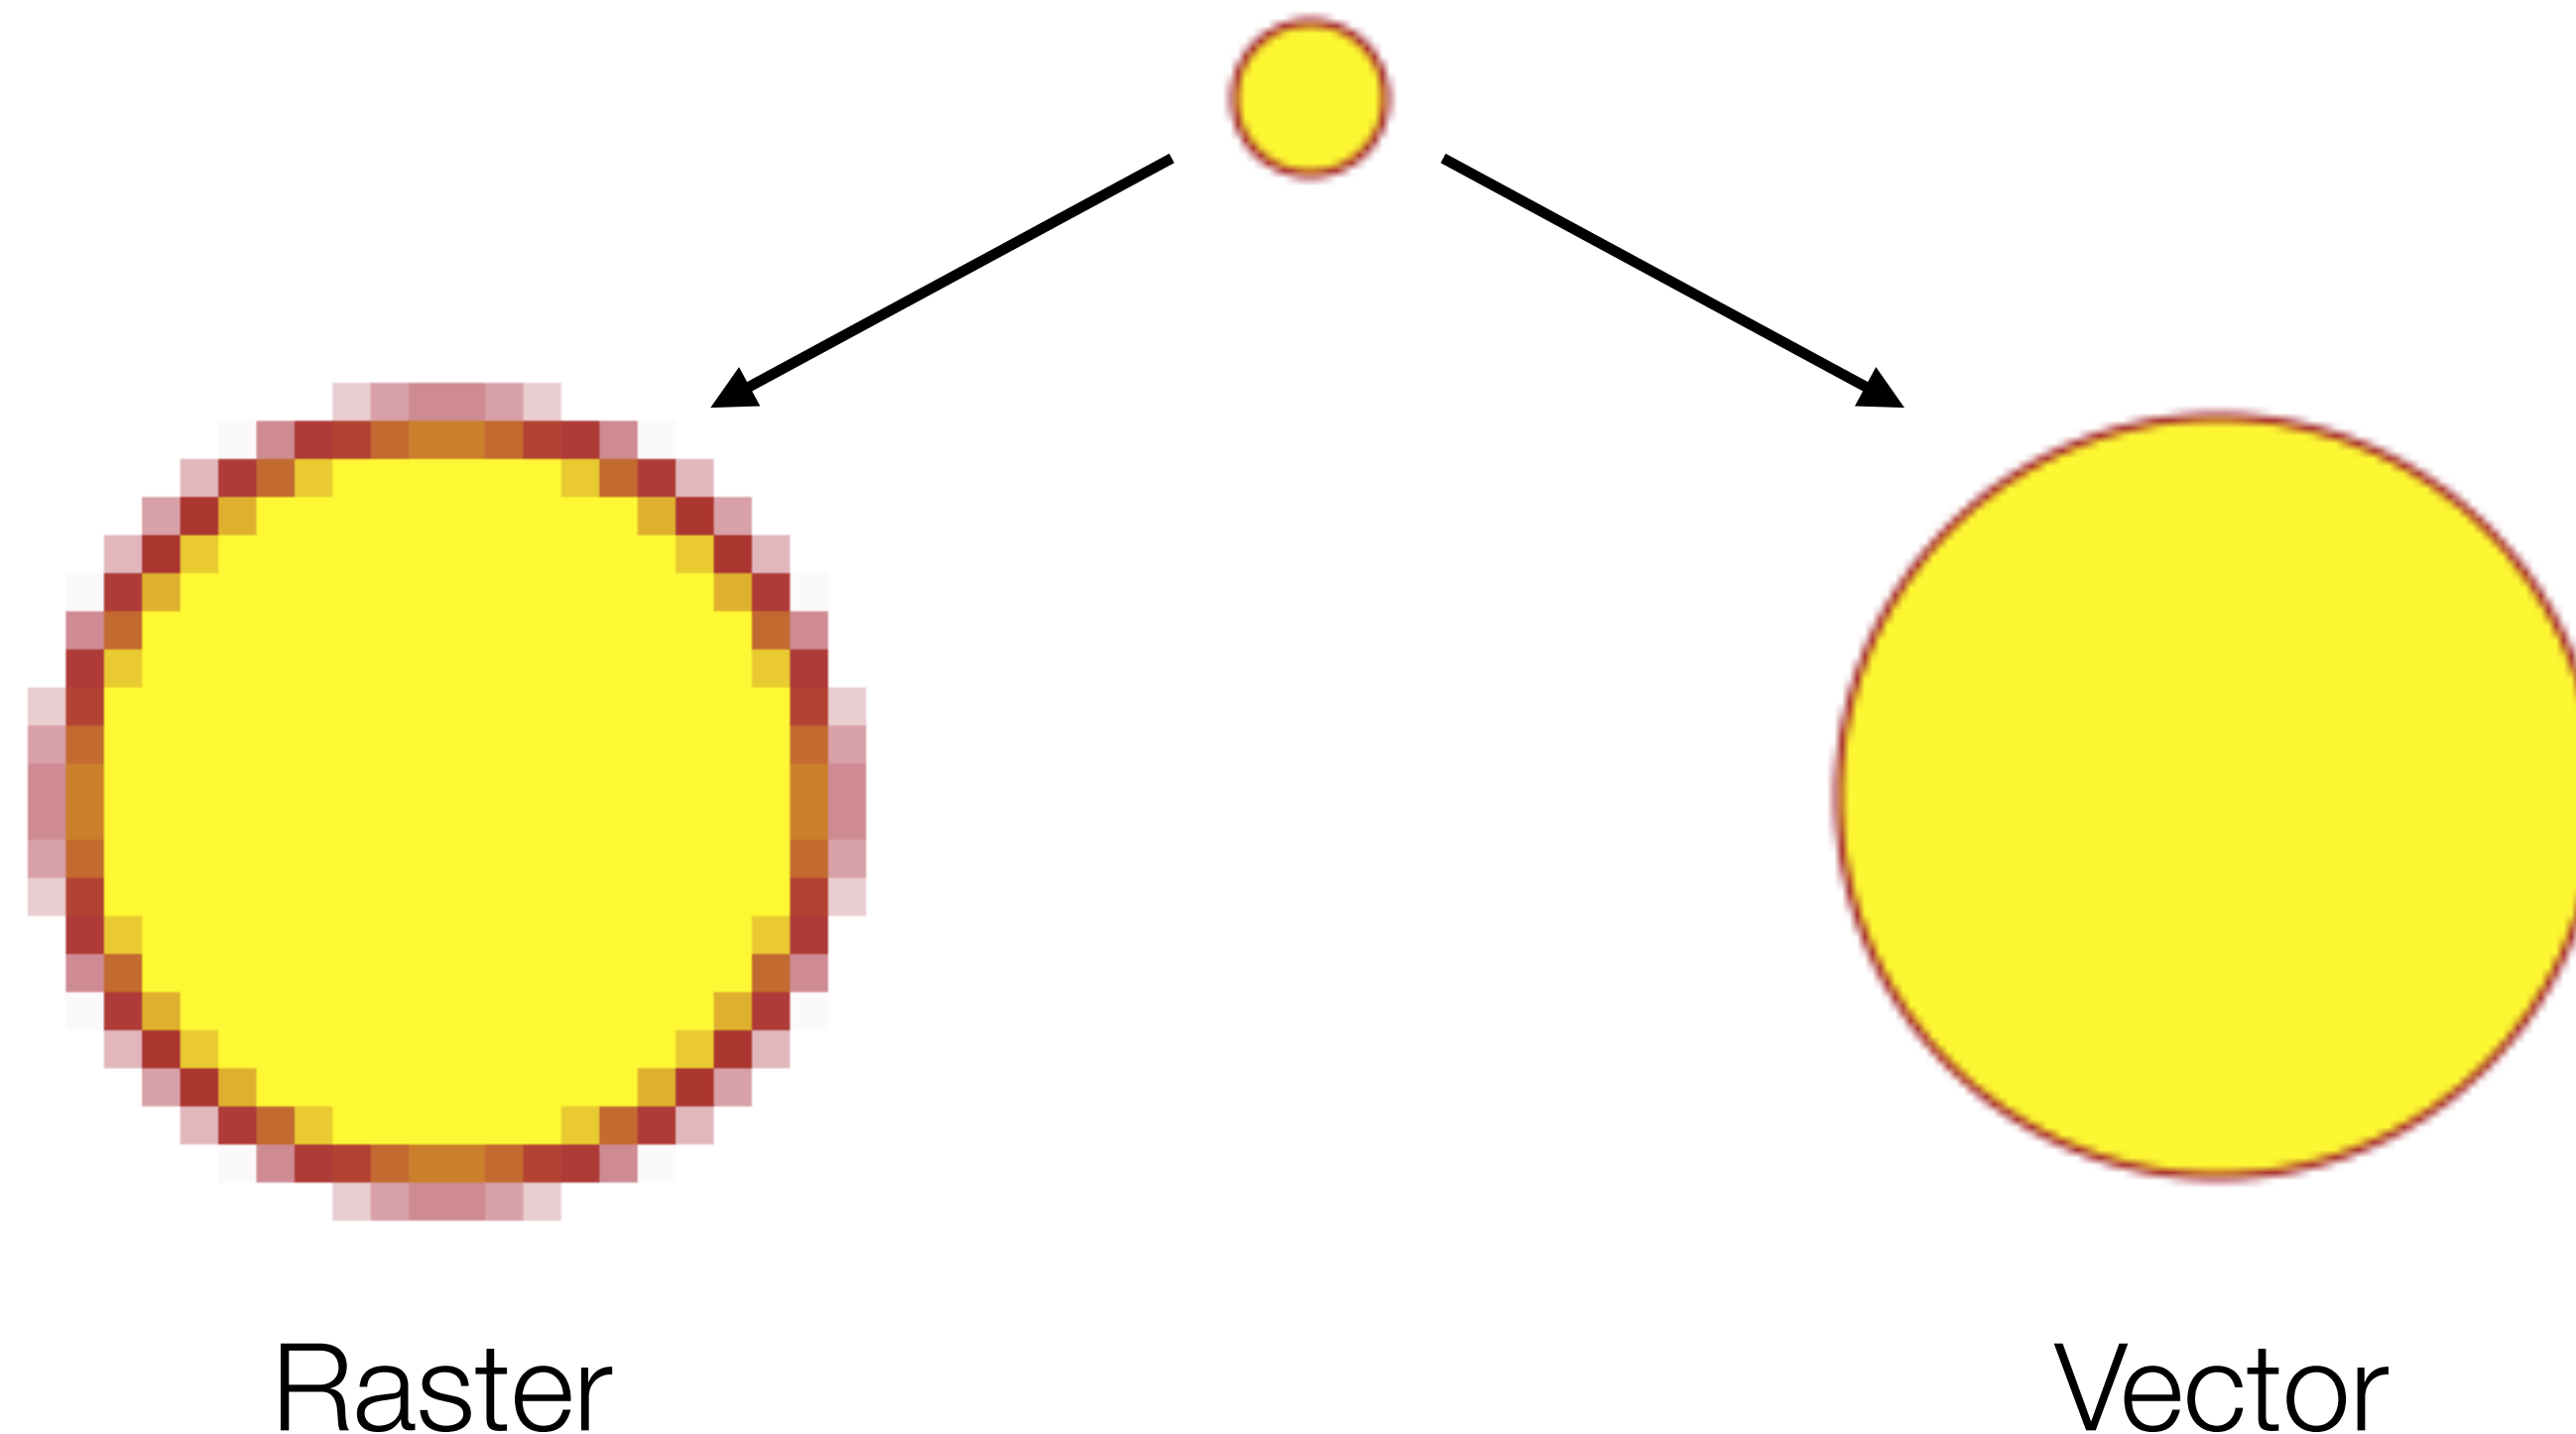

SVG Background

- Another markup language:
 - Describe the shapes and paths by their endpoints, characteristics
- SVG can be embedded into HTML5 documents!
- Pixel Coordinates: **Top-left** origin

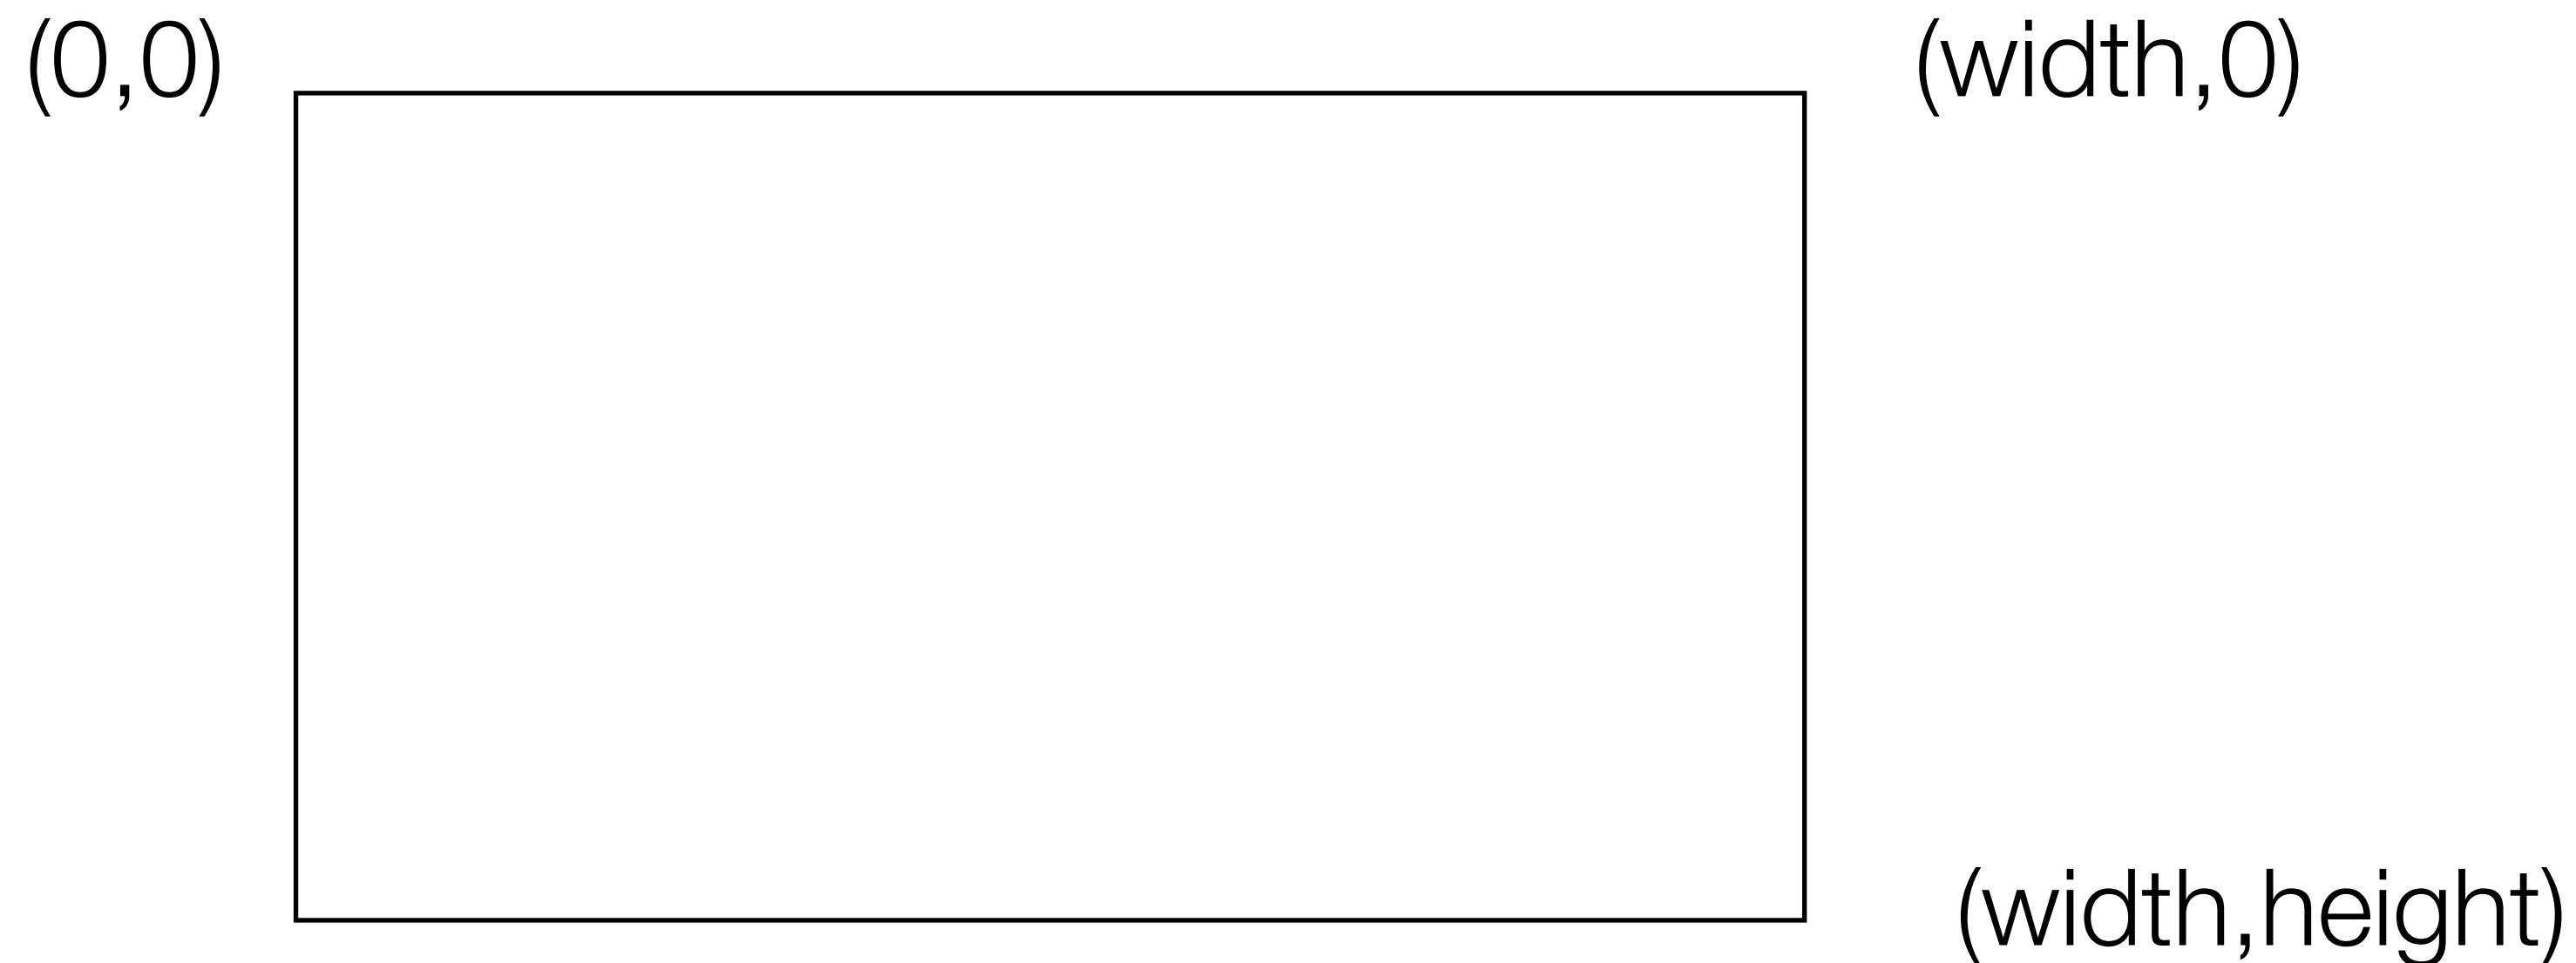

SVG Elements




- Drawing primitives:
 - Lines, Circles, Rects, Ellipses, Text, Polylines, Paths
 - Work by specifying information about **how** to draw the shape
 - Lots more: see [MDN Documentation](#)
- Ordering/Stacking:
 - SVG Elements are drawn in the order they are specified
- Paths: directions for drawing
 - <https://developer.mozilla.org/en-US/docs/Web/SVG/Tutorial/Paths>

SVG Styles

- We can specify styles of SVG elements in CSS!
- Example:

```
circle { fill: green; stroke: black;
        stroke-width: 4px; }
.normal { fill: red; stroke: blue;
          stroke-width: 2px; }
#p1 { fill: none; stroke: red; stroke-width: 3px; }
```

SVG Example

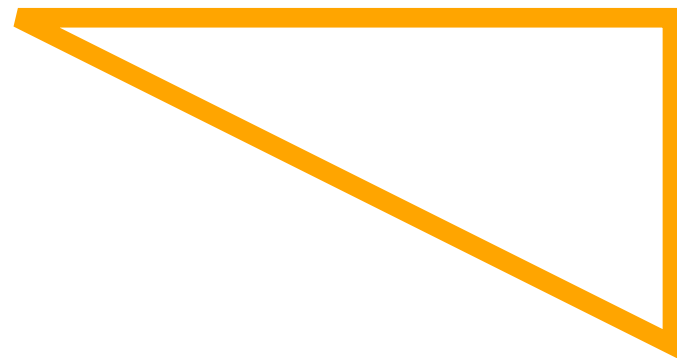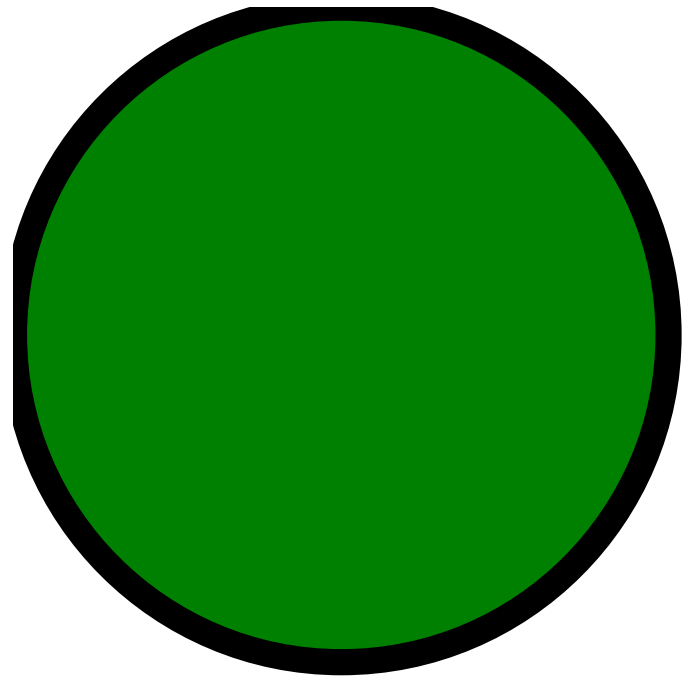

```
<svg id="mysvg" width="300" height="600">
  <circle cx="50" cy="50" r="50"/>
  <rect class="lego" x="150" y="150"
        width="50" height="20"/>
  <path id="triangle" d="M 20 200
                        L 120 200 L 120 250 Z"/>
```

```
</svg>
```

```
circle { fill: green; stroke: black;
          stroke-width: 4px; }
```

```
.lego { fill: red; stroke: blue;
        stroke-width: 2px; }
```

```
#triangle { fill: none; stroke: orange;
            stroke-width: 3px; }
```